TI01033P/00/EN/09.24-00
71682519
2024-11-18



# Technical Information
# **Deltabar FMD71, FMD72**

Level measurement with electronic differential pressure
HART



## Electronic differential pressure transmitter with ceramic and metallic measuring cells

### Field of application

The device is used to measure the level, volume or mass of liquids in pressurized and vacuum vessels.

### Your benefits

**The electronic differential pressure system eliminates traditional mechanical issues resulting in greater process availability and reliability**

- Safety risks are minimized with the electronic differential pressure system architecture and design
- Lowest total cost of ownership due to reduced installation time, maintenance, downtime and spare requirements, downtime and spare requirements.
- Multivariable level measurement: HART-based differential pressure, head pressure and sensor temperatures from one system
- Continuous health indication of the entire system via HART-based diagnostic
- High reproducibility and long-term stability
- Overload-resistant and function-monitored

Endress+Hauser
People for Process Automation

# Table of contents


**About this document** . . . . . 4
Document function . . . . . 4
Symbols . . . . . 4
List of abbreviations . . . . . 5
Turn down calculation . . . . . 5

**Function and system design** . . . . . 6
Measuring principle - electronic differential pressure measurement . . . . . 6
Measuring system . . . . . 7
Product design . . . . . 7

**Input** . . . . . 8
Measured variable . . . . . 8
FMD71: measuring range of individual sensors . . . . . 8
FMD72: measuring range of individual sensors . . . . . 9

**Output** . . . . . 10
Output signal . . . . . 10
Signal range 4 to 20 mA . . . . . 10
Signal on alarm 4 to 20 mA . . . . . 10
Maximum load . . . . . 10
Dead time, time constant . . . . . 11
Dynamic behavior, current output . . . . . 11
Dynamic behavior, HART . . . . . 11
Damping . . . . . 11
Alarm current . . . . . 11
Firmware version . . . . . 11
Wireless HART data . . . . . 11
Protocol-specific data . . . . . 12

**Energy supply** . . . . . 13
Terminal assignment . . . . . 13
Supply voltage . . . . . 13
Terminals . . . . . 14
Cable entries . . . . . 14
Cable specification for transmitter connection . . . . . 14
Residual ripple . . . . . 14
Influence of power supply . . . . . 14
Overvoltage protection . . . . . 14

**Performance characteristics of the ceramic process membrane** . . . . . 15
Reference operating conditions . . . . . 15
Influence of the installation position depending on sensor . 15
Resolution . . . . . 15
Vibration effects . . . . . 15
Application limits . . . . . 15
Reference accuracy . . . . . 16
Thermal change in the zero output and the output span . . . 16
Total performance . . . . . 17
Long-term stability . . . . . 18
Total error . . . . . 18
Warm-up time . . . . . 18

**Performance characteristics of metallic process membrane** . . . . . 19
Reference operating conditions . . . . . 19
Influence of the installation position depending on sensor . 19
Resolution . . . . . 19
Vibration effects . . . . . 19
Application limits . . . . . 19
Reference accuracy . . . . . 20
Thermal change in the zero output and the output span . . . 20
Total performance . . . . . 21
Long-term stability . . . . . 21
Total error . . . . . 21
Warm-up time . . . . . 21

**Mounting** . . . . . 22
Mounting location . . . . . 22
Orientation . . . . . 22
General installation instructions . . . . . 22
Thermal insulation - FMD71 high-temperature version . . . 22
Installing the sensor modules . . . . . 23
Mounting sensor modules with PVDF installation coupling . . . . . 23
Installing the transmitter . . . . . 23
Sensor and transmitter cable . . . . . 23

**Environment** . . . . . 25
Ambient temperature range . . . . . 25
Storage temperature . . . . . 25
Climate class . . . . . 25
Degree of protection . . . . . 25
Vibration resistance . . . . . 25
Electromagnetic compatibility (EMC) . . . . . 25

**Process** . . . . . 26
Process temperature range for devices with ceramic process membrane FMD71 . . . . . 26
Process temperature range for devices with metallic process membrane FMD72 . . . . . 26
Process pressure range . . . . . 27

**Mechanical construction** . . . . . 28
Device height . . . . . 28
T14 transmitter housing (optional display on the side) . . . . 29
T17 transmitter housing (optional display on the side) . . . . 29
Sensor housing . . . . . 30
Selecting the electrical connection . . . . . 30
Explanation of terms . . . . . 30
Process connections FMD71, internal process membrane . . 31
Process connections FMD71, internal membrane . . . . . 32
Process connections FMD71, internal membrane . . . . . 33
Process connections FMD71, flush membrane . . . . . 34
Process connections FMD71, flush process membrane . . . . 35
Process connections FMD71, flush process membrane . . . . 36
FMD71 hygiene . . . . . 37
Process connections FMD71, flush membrane . . . . . 41
Process connections FMD71, flush membrane . . . . . 42
Process connections FMD71, flush process membrane . . . . 43
Process connections FMD72, internal process membrane . . 44

Process connections FMD72, internal membrane . . . . . 45
Process connections FMD72, flush process membrane . . . . 46
Process connections FMD72, flush membrane . . . . . 47
Process connections FMD72, flush process membrane . . . . 48
Process connections FMD72, flush process membrane . . . . 49
FMD72 hygiene . . . . . 50
Wall and pipe mounting with mounting bracket . . . . . 53
Materials in contact with process . . . . . 54
Materials not in contact with process . . . . . 55

**Operability . . . . . 59**
Operation concept . . . . . 59
Local operation . . . . . 59
System integration . . . . . 61
Languages . . . . . 61

**Certificates and approvals . . . . . 62**
CE approval . . . . . 62
RoHS . . . . . 62
RCM marking . . . . . 62
Ex approvals . . . . . 62
Suitable for hygiene applications . . . . . 62
Pressure Equipment Directive 2014/68/EU (PED) . . . . . 62
CRN approval . . . . . 63
Classification of process sealing between electrical systems and (flammable or combustible) process fluids in accordance with ANSI/ISA 12.27.01 . . . . . 63
Inspection certificates . . . . . 63

**Ordering information . . . . . 64**
Scope of delivery . . . . . 64
Measuring point (TAG) . . . . . 64
Test reports, declarations and inspection certificates . . . . . 64

**Accessories . . . . . 65**
Service-specific accessories . . . . . 65

**Documentation . . . . . 66**

**Registered trademarks . . . . . 66**
HART® . . . . . 66

# About this document

**Document function**

The document contains all the technical data on the device and provides an overview of the accessories and other products that can be ordered for the device.

**Symbols**

## Safety symbols

DANGER
This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury.

WARNING
This symbol alerts you to a potentially dangerous situation. Failure to avoid this situation can result in serious or fatal injury.

CAUTION
This symbol alerts you to a potentially dangerous situation. Failure to avoid this situation can result in minor or medium injury.

NOTICE
This symbol alerts you to a potentially harmful situation. Failure to avoid this situation can result in damage to the product or something in its vicinity.

## Electrical symbols

⏚ Ground connection
Grounded clamp, which is grounded via a grounding system.

⊜ Protective earth (PE)
Ground terminals, which must be grounded prior to establishing any other connections. The ground terminals are located on the inside and outside of the device.

## Symbols for certain types of information

**Permitted**
Procedures, processes or actions that are permitted

**Forbidden**
Procedures, processes or actions that are forbidden

**Tip**
Indicates additional information

Reference to documentation


## Symbols in graphics

**1, 2, 3, ...**
Item numbers

1., 2., 3.
Series of steps


**A, B, C, ...**
Views

## List of abbreviations

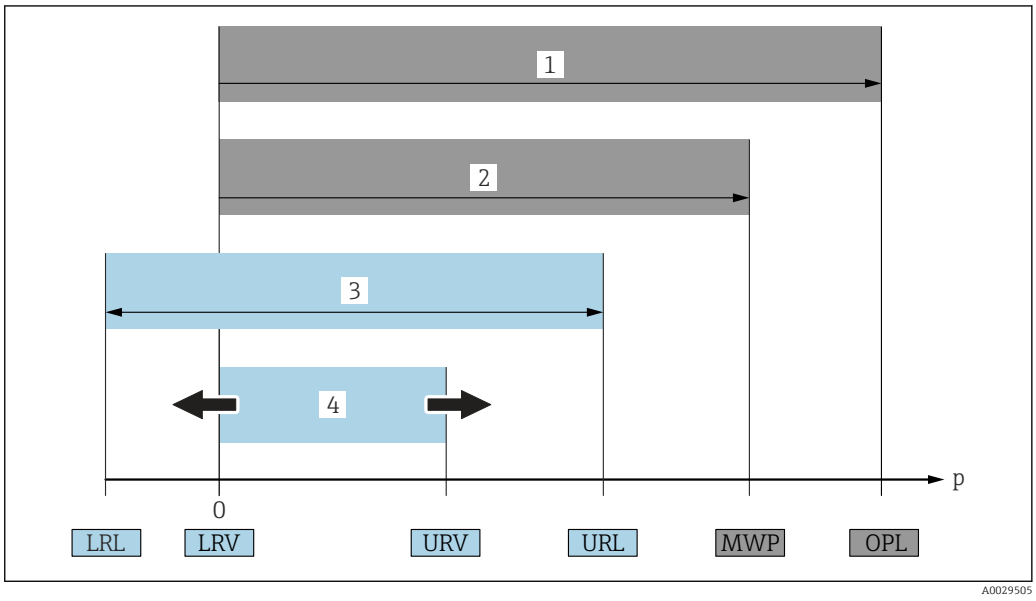


1 *OPL: The OPL (overpressure limit = measuring cell overload limit) for the device depends on the lowest-rated element, with regard to pressure, of the selected components, i.e. the process connection has to be taken into consideration in addition to the measuring cell. Pay attention to the pressure/temperature dependency.*
2 *The MWP (maximum working pressure) for the measuring cells depends on the lowest-rated element, with regard to pressure, of the selected components, i.e. the process connection has to be taken into consideration in addition to the measuring cell. Pay attention to the pressure/temperature dependency. The MWP may be applied at the device for an unlimited period of time. The MWP can be found on the nameplate.*
3 *The maximum measuring range corresponds to the span between the LRL and URL. This measuring range is equivalent to the maximum calibratable/adjustable span.*
4 *The calibrated/adjusted span corresponds to the span between the LRV and URV. Factory setting: 0 to URL. Other calibrated spans can be ordered as customized spans.*
*p Pressure*
*LRL Lower range limit*
*URL Upper range limit*
*LRV Lower range value*
*URV Upper range value*
*TD Turn down. Example - see the following section.*

## Turn down calculation

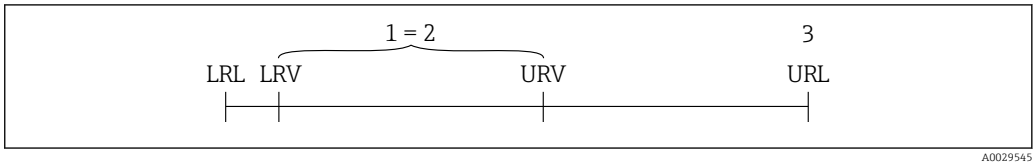


1 *Calibrated/adjusted span*
2 *Zero point-based span*
3 *Upper range limit*

Example:
- Measuring cell: 10 bar (150 psi)
- Upper range limit (URL) = 10 bar (150 psi)
- Calibrated/adjusted span: 0 to 5 bar (0 to 75 psi)
- Lower range value (LRV) = 0 bar (0 psi)
- Upper range value (URV) = 5 bar (75 psi)

$$TD = \frac{URL}{|URV - LRV|}$$

In this example, the TD is 2:1. This span is based on the zero point.


# Function and system design

## Measuring principle - electronic differential pressure measurement

### Devices with ceramic process membrane (Ceraphire®)

The ceramic measuring cell is oil-free, i.e., the pressure acts directly on the robust ceramic process membrane and causes it to deflect. A pressure-dependent change in capacitance is measured at the electrodes of the ceramic substrate and the process membrane. The measuring range is determined by the thickness of the ceramic process membrane.

**Advantages:**
- Guaranteed overload resistance up to 40 times the nominal pressure
- Thanks to ultrapure 99.9 % ceramic (Ceraphire®, see also "www.endress.com/ceraphire")
  - Extremely high chemical durability
  - Less relaxation
  - High mechanical durability
- Can be used in absolute vacuum up to 150 °C (302 °F)
- Small measuring ranges

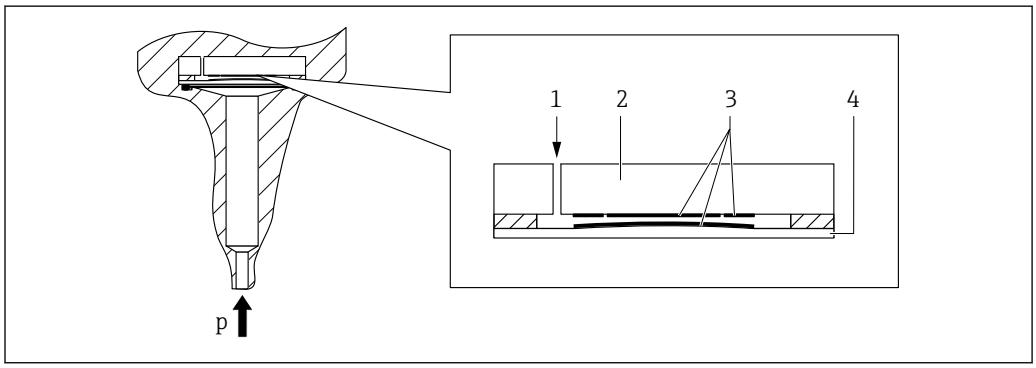



A0020465

*1 Atmospheric pressure (gauge pressure measuring cell)*
*2 Ceramic substrate*
*3 Electrodes*
*4 Ceramic process membrane*

### Devices with metallic process membrane

The process pressure deflects the metallic process membrane of the measuring cell and a fill fluid transfers the pressure to a Wheatstone bridge (semiconductor technology). The pressure-dependent change in the bridge output voltage is measured and evaluated.

**Advantages:**
- Can be used for process pressure up to 40 bar (600 psi)
- Fully welded process membrane
- Small, flush-mounted process connections
- Significantly reduced thermal effect e.g. compared to diaphragm seal systems with capillaries

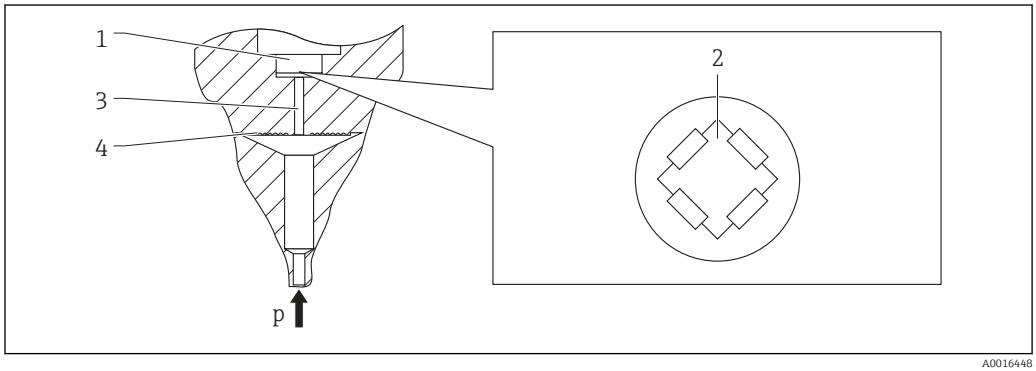


A0016448


*1 Silicon measuring element, carrier*
*2 Wheatstone bridge*
*3 Channel with fill fluid*
*4 Metallic process membrane*

**Measuring system**

The device consists of two sensor modules and one transmitter. One sensor module measures the hydrostatic pressure (high pressure) and the other one the head pressure (low pressure). The level (electronic differential pressure) is calculated in the transmitter using these two digital values.

**Product design**

Level measurement (level, volume and mass) with: Deltabar

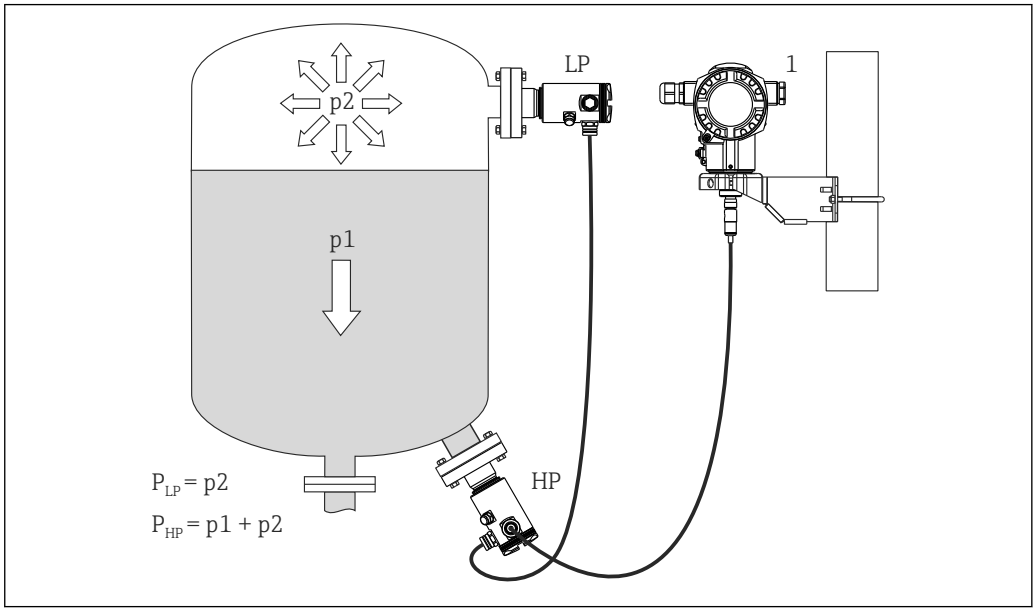


*LP Sensor module LP (low pressure)*
*HP Sensor module HP (high pressure)*
*p2 Head pressure*
*p1 Hydrostatic pressure*
*1 Transmitter*

The device is best suited to level measurement in vessels with pressure overlay or vacuum tanks, high distillation columns and other vessels with changing ambient temperatures.

The sensor module HP is mounted on the lower measuring connection and the sensor module LP is mounted above the maximum level. The transmitter can be mounted on pipes or walls with the mounting bracket.

The sensor signal is transmitted digitally. In addition, sensor temperatures and the individual process pressures present at the respective sensor modules can be individually evaluated and transmitted.

NOTICE

**Incorrect sizing/order of sensor modules**

- In a closed system, please note that the sensor module is affected by the superimposed head pressure (p2) in addition to the hydrostatic pressure (p1). This must be taken into account when sizing the sensor module on the high-pressure side (HP).

# Input

## Measured variable

### Measured process variables

- Pressure HP and Pressure LP
- Sensor temperature HP and sensor temperature LP
- Transmitter temperature

### Calculated process variables

- Differential pressure
- Level (level, volume or mass)

## FMD71: measuring range of individual sensors

The maximum span of the differential pressure corresponds to the URL of the HP sensor.

### Gauge pressure

| Measuring cell | Maximum measuring range | | MWP | OPL | Vacuum resistance | Option [1] |
|---|---|---|---|---|---|---|
| | lower (LRL) | upper (URL) | | | | |
| | [bar (psi)] | [bar (psi)] | [bar (psi)] | [bar (psi)] | [$bar_{abs}$ ($psi_{abs}$)] | |
| 100 mbar (1.5 psi) | −0.1 (−1.5) | +0.1 (+1.5) | 2.7 (40.5) | 4 (60) | 0.7 (10.5) | 1C |
| 250 mbar (4 psi) | −0.25 (−4) | +0.25 (+4) | 3.3 (49.5) | 5 (75) | 0.5 (7.5) | 1E |
| 400 mbar (6 psi) | −0.4 (−6) | +0.4 (+6) | 5.3 (79.5) | 8 (120) | 0 | 1F |
| 1 bar (15 psi) | −1 (−15) | +1 (+15) | 6.7 (100.5) | 10 (150) | 0 | 1H |
| 2 bar (30 psi) | −1 (−15) | +2 (+30) | 12 (180) | 18 (270) | 0 | 1K |
| 4 bar (60 psi) | −1 (−15) | +4 (+60) | 16.7 (250.5) | 25 (375) | 0 | 1M |
| 10 bar (150 psi) | −1 (−15) | +10 (+150) | 26.7 (400.5) | 40 (600) | 0 | 1P |
| 40 bar (600 psi) | −1 (−15) | +40 (+600) | 40 (600) | 60 (900) | 0 | 1S |

1) Product Configurator, order code for "Sensor range"

### Absolute pressure

| Measuring cell | Maximum measuring range | | MWP | OPL | Vacuum resistance | Option [1] |
|---|---|---|---|---|---|---|
| | lower (LRL) | upper (URL) | | | | |
| | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | |
| 100 mbar (1.5 psi) | 0 | +0.1 (+1.5) | 2.7 (40.5) | 4 (60) | 0 | 2C |
| 250 mbar (4 psi) | 0 | +0.25 (+4) | 3.3 (49.5) | 5 (75) | 0 | 2E |
| 400 mbar (6 psi) | 0 | +0.4 (+6) | 5.3 (79.5) | 8 (120) | 0 | 2F |
| 1 bar (15 psi) | 0 | +1 (+15) | 6.7 (100.5) | 10 (150) | 0 | 2H |
| 2 bar (30 psi) | 0 | +2 (+30) | 12 (180) | 18 (270) | 0 | 2K |
| 4 bar (60 psi) | 0 | +4 (+60) | 16.7 (250.5) | 25 (375) | 0 | 2M |
| 10 bar (150 psi) | 0 | +10 (+150) | 26.7 (400.5) | 40 (600) | 0 | 2P |
| 40 bar (600 psi) | 0 | +40 (+600) | 40 (600) | 60 (900) | 0 | 2S |

1) Product Configurator, order code for "Sensor range"

**FMD72: measuring range of individual sensors**

The maximum span of the differential pressure corresponds to the URL of the HP sensor.

### Gauge pressure

| Sensor | Maximum sensor measuring range | | MWP | OPL | Vacuum resistance [1] | Option [2] |
|---|---|---|---|---|---|---|
| | lower (LRL) | upper (URL) | | | silicone oil | |
| | [bar (psi)] | [bar (psi)] | [bar (psi)] | [bar (psi)] | [$bar_{abs}$ ($psi_{abs}$)] | |
| 400 mbar (6 psi) | −0.4 (−6) | +0.4 (+6) | 4 (60) | 6 (90) | 0.01 (0.15) | 1F |
| 1 bar (15 psi) | −1 (−15) | +1 (+15) | 6.7 (100) | 10 (150) | 0.01 (0.15) | 1H |
| 2 bar (30 psi) | −1 (−15) | +2 (+30) | 13.3 (200) | 20 (300) | 0.01 (0.15) | 1K |
| 4 bar (60 psi) | −1 (−15) | +4 (+60) | 18.7 (280.5) | 28 (420) | 0.01 (0.15) | 1M |
| 10 bar (150 psi) | −1 (−15) | +10 (+150) | 26.7 (400.5) | 40 (600) | 0.01 (0.15) | 1P |
| 40 bar (600 psi) | −1 (−15) | +40 (+600) | 100 (1500) | 160 (2400) | 0.01 (0.15) | 1S |

1) The vacuum resistance applies for the measuring cell under reference operating conditions. (see "Reference operating conditions" section)
2) Product Configurator order code for "Sensor range"

### Absolute pressure




| Sensor | Maximum sensor measuring range | | MWP | OPL | Vacuum resistance [1] | Option [2] |
|---|---|---|---|---|---|---|
| | lower (LRL) | upper (URL) | | | silicone oil | |
| | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | [$bar_{abs}$ ($psi_{abs}$)] | |
| 1 bar (15 psi) | 0 | +1 (+15) | 6.7 (100) | 10 (150) | 0.01 (0.15) | 2H |
| 2 bar (30 psi) | 0 | +2 (+30) | 13.3 (200) | 20 (300) | 0.01 (0.15) | 2K |
| 4 bar (60 psi) | 0 | +4 (+60) | 18.7 (280.5) | 28 (420) | 0.01 (0.15) | 2M |
| 10 bar (150 psi) | 0 | +10 (+150) | 26.7 (400.5) | 40 (600) | 0.01 (0.15) | 2P |
| 40 bar (600 psi) | 0 | +40 (+600) | 100 (1500) | 160 (2400) | 0.01 (0.15) | 2S |

1) The vacuum resistance applies for the measuring cell under reference operating conditions. (see "Reference operating conditions" section)
2) Product Configurator order code for "Sensor range"

# Output

**Output signal**

4 to 20 mA with superimposed digital communication protocol HART 6.0, 2-wire

| Operation | Internal + LCD | External [1] + LCD | Internal |
|---|---|---|---|
| |  |  |  A0021280 |
| Product Configurator: Order code 030 | 4 | 5 | 8 |

1) In the case of the T17 transmitter housing, the operating keys are always arranged internally on the electronic insert.

**Signal range 4 to 20 mA**


3.8 to 20.5 mA

**Signal on alarm 4 to 20 mA**

As per NAMUR NE43
- Max. alarm (factory setting 22 mA): can be set from 21 to 23 mA
- Hold measured value: last measured value is held
- Min. alarm: 3.6 mA

**Maximum load**

In order to guarantee sufficient terminal voltage in two-wire devices, a maximum load resistance R (including line resistance) must not be exceeded depending on the supply voltage $U_0$ of the supply unit. In the following load diagrams, observe the position of the jumper and the explosion protection:

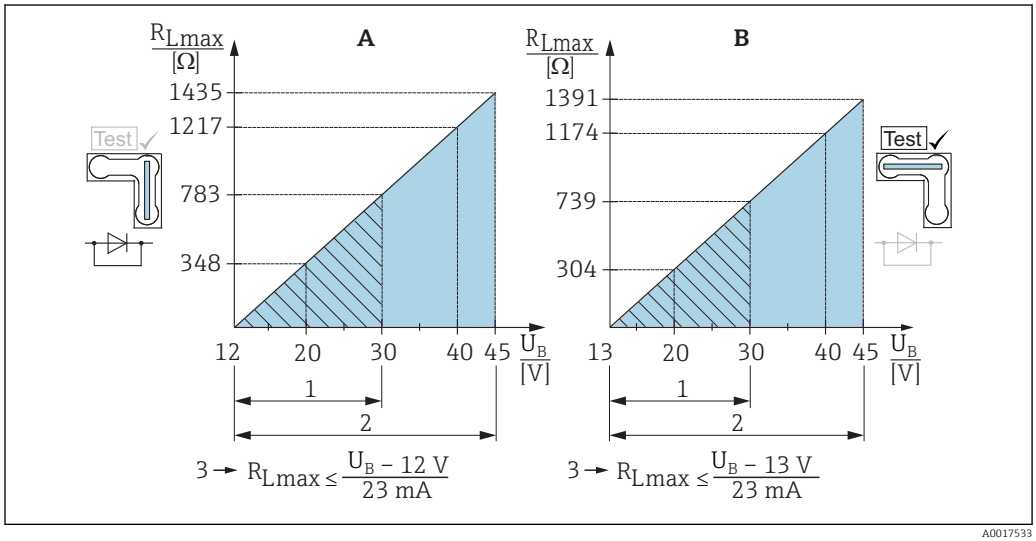


A0017533

*A Jumper for 4 to 20 mA test signal set to "Non-Test" position*
*B Jumper for 4 to 20 mA test signal set to "Test" position*
*1 Power supply for II 1/2 G Ex ia, FM IS, CSA IS*
*2 Power supply for devices for the non-hazardous area, 2 G Ex d, 3 G Ex nA, FM XP, FM NI, CSA XP, CSA dust ignition-proof*
*3 $R_{Lmax}$ maximum load resistance*
*$U_B$ Supply voltage*

When operating using a handheld terminal or a PC with an operating program, a minimum communication resistance of 250 Ω has to be taken into account.

**Dead time, time constant**

Presentation of the dead time and the time constant:

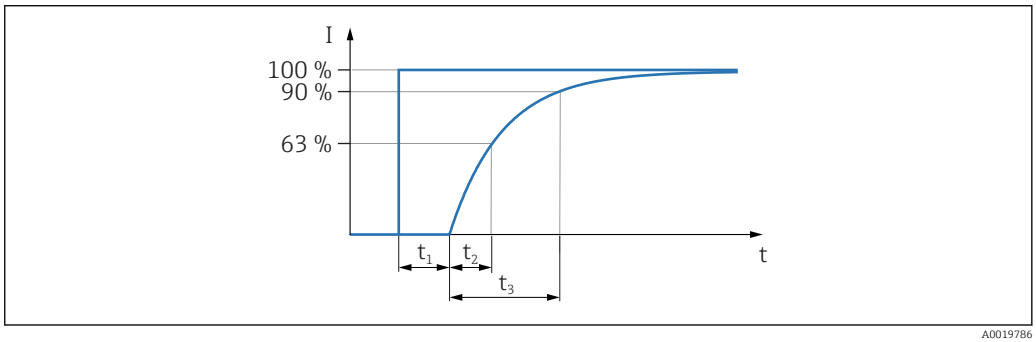


**Dynamic behavior, current output**

| | Dead time ($t_1$) [ms] | Time constant (T63), $t_2$ | Time constant (T90), $t_3$ |
|---|---|---|---|
| Max. | 120 | 120 | 280 |

**Dynamic behavior, HART**

| | Dead time ($t_1$) [ms] | Dead time ($t_1$) [ms] + Time constant T63 (= $t_2$) [ms] | Dead time ($t_1$) [ms] + Time constant T90 (= $t_3$) [ms] |
|---|---|---|---|
| Min. | 280 | 400 | 560 |
| Max. | 1 100 | 1 220 | 1 380 |

### Read cycle

- Acyclic: max. 3/s, typically 1/s (depending on command # and number of preambles)
- Cyclic (burst): max. 3/s, typically 2/s

The Deltabar FMD71/FMD72 offers BURST MODE functionality for cyclical value transmission via the HART communication protocol.

### Cycle time (update time)

Cyclic (burst): min. 300 ms

### Response time

- Acyclic: min. 330 ms, typically 590 ms (depending on command # and number of preambles)
- Cyclic (burst): min. 160 ms, typically 350 ms (depending on command # and number of preambles)

**Damping**

A damping affects all outputs (output signal, display):
- Via local display, handheld terminal or PC with operating program, infinitely variable 0 to 999 s
- Via DIP switch on the electronic insert, switch position "on" = set value and "off"
- Factory setting: 2 s

Damping can be switched on or off using a switch on the electronic insert. If the switch is on, the time constant can be set via a parameter in the menu and if the switch is off, the output signal is not damped (time constant = 0.0).

**Alarm current**

Set min. alarm current: Product Configurator, order code 570

**Firmware version**

| Designation | Product Configurator: Feature 850, variant: |
|---|---|
| 01.00.zz, HART, DevRev01 | 78 |

**Wireless HART data**

- Minimum start-up voltage: 13 V
- Start-up current: 12 mA (default) or 22 mA (customer setting)
- Start-up time: 10 s
- Minimum operating voltage: 13 V
- Multidrop current: 4 mA
- Time to establish connection: 0 s

## Protocol-specific data

| | |
|---|---|
| Manufacturer ID | 17 (0x11) |
| Device type ID | 39 (0x27) |
| HART specification | 6.0 |
| Device description files (DTM, DD) | Information and files available at:<br>▪ www.endress.com<br>▪ www.fieldcommgroup.org/registered-products |
| HART device variables | **Measured values for PV (primary variable)**<br>▪ Differential pressure<br>▪ Level linear (before lin.)<br>▪ Level after linearization table<br>**Measured values for SV, TV, QV (second, third and fourth variable)**<br>▪ Measured differential pressure<br>▪ Corrected pressure<br>▪ Measured pressure HP<br>▪ Sensor pressure HP<br>▪ Sensor temperature HP<br>▪ Measured pressure LP<br>▪ Sensor pressure LP<br>▪ Sensor temperature LP<br>▪ Level before linearization<br>▪ Tank content<br>▪ Electronic temperature |
| Supported functions | ▪ Burst mode<br>▪ Additional transmitter status |


# Energy supply

**⚠ WARNING**

**Electrical safety is compromised by an incorrect connection!**

- In accordance with IEC/EN61010 a separate circuit breaker must be provided for the device .
- When using the measuring device in hazardous areas, installation must comply with the corresponding national standards and regulations and the Safety Instructions or Installation or Control Drawings.
- All explosion protection data are given in separate documentation which is available upon request. The Ex documentation is supplied as standard with all devices approved for use in explosion hazardous areas.
- Devices with integrated overvoltage protection must be grounded.
- Protective circuits against reverse polarity, HF influences and overvoltage peaks are integrated.

## Terminal assignment

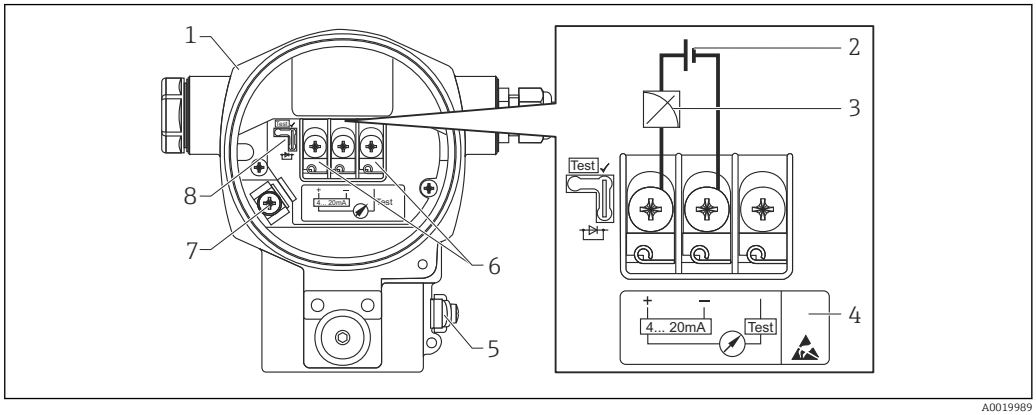


A0019989


1 *Housing*
2 *Supply voltage*
3 *4 to 20 mA*
4 *Devices with integrated overvoltage protection are labeled "OVP" (overvoltage protection) here.*
5 *External ground terminal*
6 *4 to 20 mA test signal between positive and test terminal*
7 *Internal ground terminal, minimum supply voltage = 12 $V_{DC}$, jumper is inserted as illustrated in the graphic.*
8 *Jumper for 4 to 20 mA test signal*

## Supply voltage

| Electronic version | Jumper for 4 to 20 mA test signal in "Test" position (as-delivered state) | Jumper for 4 to 20 mA test signal in "Non-Test" position |
|---|---|---|
| 4 to 20 mA HART, version for non-hazardous area | 13 to 45 $V_{DC}$ | 12 to 45 $V_{DC}$ |

### Measuring a 4 to 20 mA test signal

A 4 to 20 mA test signal may be measured via the positive and test terminal without interrupting the measurement. The minimum supply voltage of the device can be reduced by simply changing the position of the jumper. As a result, operation is also possible with a lower supply voltage. To keep the measurement error below 0.1 %, the current measuring instrument should exhibit an internal resistance of <0.7Ω. Observe the position of the jumper in accordance with the following table.

| Jumper position for test signal | Description |
|---|---|
|  A0019992 | ▪ Possible to measure 4 to 20 mA test signal via positive and test terminal. (Thus, the output current can be measured without interruption via the diode.)<br>▪ As-delivered state<br>▪ Minimum supply voltage: 13 $V_{DC}$ |
|  A0019993 | ▪ Not possible to measure 4 to 20 mA test signal via positive and test terminal.<br>▪ Minimum supply voltage: 12 $V_{DC}$ |

**Terminals**

- Supply voltage and internal ground terminal: 0.5 to 2.5 $mm^2$ (20 to 14 AWG)
- External ground terminal: 0.5 to 4 $mm^2$ (20 to 12 AWG)

**Cable entries**

| Type of protection | Cable gland | Permitted cable diameter | Permitted wire cross-sections |
|---|---|---|---|
| ▪ Standard<br>▪ Ex ia<br>▪ Ex ic | Plastic M20x1.5 | 5 to 10 mm (0.2 to 0.39 in) | 0.5 to 2.5 $mm^2$ (20 to 14 AWG) |
| ▪ Ex tD<br>▪ Ex nA<br>▪ FM approval<br>▪ CSA approval | Metal M20 x 1.5 | 7 to 10.5 mm (0.28 to 0.41 in) | |

**Cable specification for transmitter connection**

- Endress+Hauser recommends using twisted, shielded two-wire cables.
- Terminals for core cross-sections 0.5 to 2.5 $mm^2$ (20 to 14 AWG)
- The cable outer diameter depends on the cable entry used.

**Residual ripple**

Without influence on 4 to 20 mA signal up to 5 % residual ripple within the permitted voltage range [according to HART hardware specification HCF_SPEC-54 (DIN IEC 60381-1)]

**Influence of power supply**

≤0.0006 % of the URV/1 V

**Overvoltage protection**

**Standard version**

The standard version of the pressure instruments does not contain any special elements to protect against overvoltage ("wire to ground"). Nevertheless the requirements of the applicable EMC standard EN 61000-4-5 (testing voltage 1kV EMC wire/ground) are met.

**Optional overvoltage protection**

Devices showing version "NA" in feature 610 in the order code are equipped with overvoltage protection.

- Overvoltage protection:
  - Nominal functioning DC voltage: 600 V
  - Nominal discharge current: 10 kA
- Surge current check î = 20 kA satisfied as per DIN EN 60079-14: 8/20 µs
- Arrester AC current check I = 10 A satisfied

NOTICE

**Device could be destroyed!**


► Devices with integrated overvoltage protection must be grounded.

# Performance characteristics of the ceramic process membrane

**Reference operating conditions**

- As per IEC 62828
- Ambient temperature $T_A$ = constant, in the range: +21 to +33 °C (+70 to +91 °F)
- Humidity φ= constant, in the range: 5 to 80 % rH
- Atmospheric pressure $p_A$ = constant, in the range: 860 to 1 060 mbar (12.47 to 15.37 psi)
- Position of the measuring cell = constant, in the range: horizontal ±1° (see also "Influence of the installation position" section → 15)
- Input of Lo Trim Sensor and Hi Trim Sensor for lower range value and upper range value
- Zero point-based span
- Material of process membrane: $Al_2O_3$ (aluminum-oxide ceramic, Ceraphire®)
- Supply voltage: 24 V DC ±3 V DC
- Load for HART: 250 Ω

**Influence of the installation position depending on sensor**

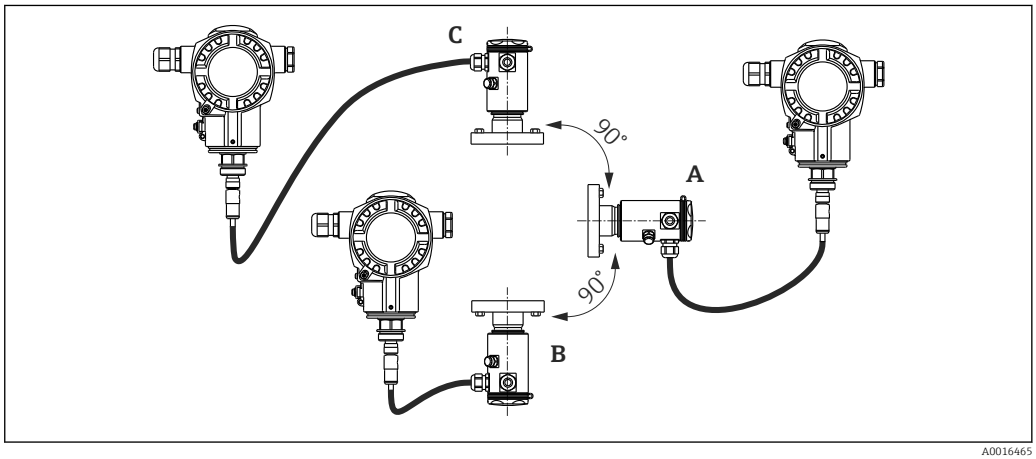


A0016465

| Process membrane axis is horizontal (A) | Process membrane pointing upwards (B) | Process membrane pointing downwards (C) |
|---|---|---|
| Calibration position, no measurement error | < +0.2 mbar (+0.003 psi) | < −0.2 mbar (−0.003 psi) |

This effect can be corrected using the function to adjust the position (position adjustment) for the differential pressure. Additional position adjustments for individual pressure signals are not available.

A position-dependent zero shift can be corrected on the device.

**Resolution**

- Current output: 1 µA
- Display: can be set (factory setting: presentation of the maximum accuracy of the transmitter)

**Vibration effects**

| Test standard | Vibration effects |
|---|---|
| IEC 61298-3 | ≤ Reference accuracy up to 10 to 60 Hz: ±0.35 mm (±0.01 in); 60 to 500 Hz: 2 g |

**Application limits**

A high ratio between the level and head pressure or between the differential pressure and static pressure can result in large measured errors. A maximum ratio of 1:10 is recommended. For calculation purposes, please use the free "Applicator" calculation tool, which is available online at "www.endress.com/applicator" or on CD-ROM.

**Reference accuracy**

The reference accuracy includes the non-linearity [DIN EN 61298-2 3.11] including the pressure hysteresis [DIN EN 61298-23.13] and non-repeatability [DIN EN 61298-2 3.11] in accordance with the limit point method as per [IEC 62828].

| Measuring cell | Sensor | Reference accuracy (A) [% of URL for every sensor] | | Calculated reference accuracy ($A_{Diff}$) of the differential pressure |
|---|---|---|---|---|
| | | Standard | Platinum | |
| 100 mbar (1.5 psi) | Gauge pressure | A = ±0.075<br>A = ±0.15 [1] | - | Calculation (mbar, bar or psi):<br>$A_{Diff} = \sqrt{\left(\frac{A_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{A_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016468<br>Percentage calculation of URL dP:<br>$A_{Diff}\,[\%] = \frac{A_{Diff} \cdot 100}{P_{Diff}}$<br>A0016469 |
| 250 mbar (3.75 psi) | Gauge pressure | A = ±0.075<br>A = ±0.15 [1] | - | |
| 400 mbar (6 psi) | Gauge pressure | A = ±0.075<br>A = ±0.15 [1] | - | |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | Gauge pressure/Absolute pressure | A = ±0.075<br>A = ±0.15 [1] | A = ±0.05<br>±0.075 [1] | |

1) For hygienic process connections

*Ordering information*

| Designation | Option [1] |
|---|---|
| Platinum | D |
| Standard | G |

1) Product Configurator, order code for "Reference accuracy"

**Thermal change in the zero output and the output span**

**Standard version**

| Measuring cell | −10 °C (+14 °F) to ≤ +60 °C (+140 °F) | −20 to −10 °C (−4 to +14 °F) > +60 to +125 °C (+140 to +257 °F) | Calculated thermal change ($T_{Diff}$) of the differential pressure |
|---|---|---|---|
| | % of URL for every sensor | | |
| 100 mbar (1.5 psi)<br>250 mbar (4 psi)<br>400 mbar (6 psi) | $T_{total}$ = ±0.176 | $T_{total}$ = ±0.276 | Calculation (mbar, bar or psi):<br>$T_{Diff} = \sqrt{\left(\frac{T_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{T_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016474<br>Percentage calculation of URL dP:<br>$T_{Diff}\,[\%] = \frac{T_{Diff} \cdot 100}{P_{Diff}}$<br>A0016475 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | $T_{total}$ = ±0.092 | $T_{total}$ = ±0.250 | |

**High temperature version and hygienic version**

| Measuring cell | Sensor | −10 °C (+14 °F) to ≤ +60 °C (+140 °F) | > +60 to +150 °C (140 to +302 °F) | Calculated thermal change ($T_{Diff}$) of the differential pressure |
|---|---|---|---|---|
| | | % of URL for every sensor | | |
| 100 mbar (1.5 psi)<br>250 mbar (4 psi)<br>400 mbar (6 psi) | Gauge pressure | $T_{total}$ = ±0.176<br>$T_{Total}$ = ±0.352 [1] | T = ±0.75<br>T = ±1.25 [1] | Calculation (mbar, bar or psi):<br>$T_{Diff} = \sqrt{\left(\frac{T_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{T_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016474<br>Percentage calculation of URL dP:<br>$T_{Diff}[\%] = \frac{T_{Diff} \cdot 100}{P_{Diff}}$<br>A0016475 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | Gauge pressure | $T_{total}$ = ±0.092<br>$T_{total}$ = ±0.184 [1] | T = ±0.5<br>T = ±0.75 [1] | |
| | | | | |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi) | Absolute pressure | $T_{total}$ = ±0.092<br>$T_{total}$ = ±0.184 [1] | T = ±0.75<br>T = ±1.25 [1] | |
| 40 bar (600 psi) | Absolute pressure | $T_{total}$ = ±0.092<br>$T_{total}$ = ±0.184 [1] | T = ±0.5<br>T = ±0.75 [1] | |

1) For hygienic process connections

**Total performance**

The "Total performance" specification comprises the non-linearity including hysteresis, non-reproducibility as well as the thermal change in the zero point. All specifications apply to the temperature range −10 to +60 °C (+14 to +140 °F).

| Measuring cell | % of URL for every sensor - standard version | % of URL for every sensor - high-temperature version | % of URL for every sensor - hygienic version | Calculated total performance ($TP_{Diff}$) of the differential pressure |
|---|---|---|---|---|
| 100 mbar (1.5 psi)<br>250 mbar (4 psi)<br>400 mbar (6 psi) | TP = ±0.2 | TP = ±0.46 | TP = ±0.575 | Calculation (mbar, bar or psi):<br>$TP_{Diff} = \sqrt{\left(\frac{TP_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{TP_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016470<br>Percentage calculation of URL dP:<br>$TP_{Diff}[\%] = \frac{TP_{Diff} \cdot 100}{P_{Diff}}$<br>A0016471 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | TP = ±0.15 | TP = ±0.46 | TP = ±0.5 | |

The "Applicator Sizing Electronic dp" selection tool, available free of charge on the Endress +Hauser web site (www.endress.com/applicator), enables detailed calculations for your respective applications.

### Long-term stability

| Measuring ranges | Sensor | Standard version | | Calculated long-term stability ($L_{Diff}$) of the differential pressure |
|---|---|---|---|---|
| | | 1 year | 10 years | |
| | | % of URL for every sensor | | |
| 100 mbar (1.5 psi)<br>250 mbar (4 psi)<br>400 mbar (6 psi) | Gauge pressure | L = ±0.1<br>L = ±0.25 [1] | L = ±0.2<br>L = ±0.45 [1] | Calculation (mbar, bar or psi):<br>$L_{Diff} = \sqrt{\left(\frac{L_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{L_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016463<br>Percentage calculation of URL dP/year:<br>$L_{Diff}\ [\%] = \frac{L_{Diff} \cdot 100}{P_{Diff}}$<br>A0016464 |
| | Absolute pressure | | L = ±0.3<br>L = ±0.55 [1] | |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | Gauge pressure | L = ±0.05<br>L = ±0.1 [1] | L = ±0.2 | |
| | Absolute pressure | | L = ±0.3 | |

1) For hygienic process connections

### Total error

The total error comprises the total performance and long-term stability. All specifications apply to the temperature range −10 to +60 °C (+14 to +140 °F).

| Measuring cell | % of URL for every sensor - standard version | % of URL for every sensor - high-temperature version | % of URL for every sensor - hygienic version | Calculated total error ($TE_{Diff}$) of the differential pressure |
|---|---|---|---|---|
| 100 mbar (1.5 psi)<br>250 mbar (4 psi)<br>400 mbar (6 psi) | TE = ±0.25 | TE = ±0.51 | TE = ±0.925 | Calculation (mbar, bar or psi):<br>$TE_{Diff} = \sqrt{\left(\frac{TE_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{TE_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016472<br>Percentage calculation of URL dP:<br>$TE_{Diff}\ [\%] = \frac{TE_{Diff} \cdot 100}{P_{Diff}}$<br>A0016473 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | TE = ±0.2 | TE = ±0.51 | TE = ±0.7 | |

### Warm-up time


4 to 20 mA HART: < 10 s

# Performance characteristics of metallic process membrane

**Reference operating conditions**

- As per IEC 62828
- Ambient temperature $T_A$ = constant, in the range: +21 to +33 °C (+70 to +91 °F)
- Humidity φ= constant, in the range: 5 to 80 % rH
- Atmospheric pressure $p_A$ = constant, in the range: 860 to 1 060 mbar (12.47 to 15.37 psi)
- Position of the measuring cell = constant, in the range: horizontal ±1° (see also "Influence of the installation position" section → 19)
- Input of Lo Trim Sensor and Hi Trim Sensor for lower range value and upper range value
- Zero point-based span
- Material of the process membrane: AISI 316 (1.4435)
- Fill fluid: silicone oil
- Supply voltage: 24 V DC ±3 V DC
- Load for HART: 250 Ω

**Influence of the installation position depending on sensor**

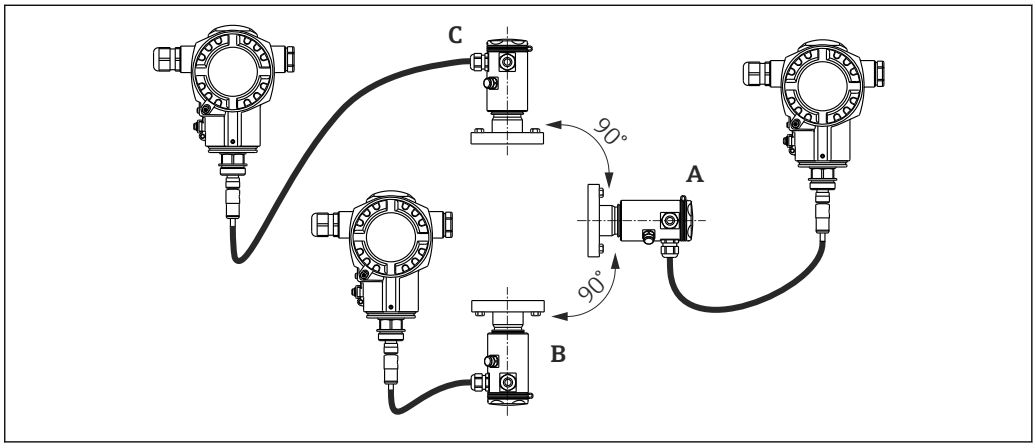


A0016465

| | Process membrane axis is horizontal (A) | Process membrane pointing upwards (B) | Process membrane pointing downwards (C) |
|---|---|---|---|
| Sensor with 1/2" thread and silicone oil | Calibration position, no measurement error | < +4 mbar (+0.06 psi) | < −4 mbar (−0.06 psi) |
| Sensor with thread > 1/2" and flanges | | < +10 mbar (+0.145 psi)<br>This value is doubled for inert oil. | < −10 mbar (−0.145 psi)<br>This value is doubled for inert oil. |

This effect can be corrected using the function to adjust the position (position adjustment) for the differential pressure. Additional position adjustments for individual pressure signals are not available.

A position-dependent zero point shift can be corrected at the device.

**Resolution**

- Current output: 1 µA
- Display: can be set (factory setting: presentation of the maximum accuracy of the transmitter)

**Vibration effects**

| Test standard | Vibration effects |
|---|---|
| IEC 61298-3 | ≤ Reference accuracy up to 10 to 60 Hz: ±0.35 mm (±0.01 in); 60 to 500 Hz: 2 g |

**Application limits**

A high ratio between the level and head pressure or between the differential pressure and static pressure can result in large measurement errors. A maximum ratio of 1:10 is recommended. For calculation purposes, please use the free "Applicator" calculation tool, which is available online at "www.endress.com/applicator" or on CD-ROM.

**Reference accuracy**

The reference accuracy includes the non-linearity [DIN EN 61298-2 3.11] including the pressure hysteresis [DIN EN 61298-23.13] and non-repeatability [DIN EN 61298-2 3.11] in accordance with the limit point method as per [IEC 62828].

| Measuring cell | Sensor | Reference accuracy (A) [% of URL for every sensor] | | Calculated reference accuracy ($A_{Diff}$) of the differential pressure |
|---|---|---|---|---|
| | | Standard | Platinum | |
| 400 mbar (6 psi) | Gauge pressure | A = ±0.15<br>±0.3 [1] | - | Calculation (mbar, bar or psi):<br>$A_{Diff} = \sqrt{\left(\frac{A_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{A_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016468<br>Percentage calculation of URL dP:<br>$A_{Diff}\,[\%] = \frac{A_{Diff} \cdot 100}{P_{Diff}}$<br>A0016469 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | Gauge pressure/<br>Absolute pressure | A = ±0.075<br>A = ±0.15 [1] | A = ±0.05<br>A = ±0.075 [1] | |

1) For hygienic process connections

*Ordering information*

| Designation | Option [1] |
|---|---|
| Platinum | D |
| Standard | G |

1) Product Configurator, order code for "Reference accuracy"

**Thermal change in the zero output and the output span**

| Measuring cell | −10 to +60 °C (+14 to +140 °F) | −40 to −10 °C (−40 to +14 °F)<br>+60 to +80 °C (+140 to +176 °F) | Calculated thermal change ($T_{Diff}$) of the differential pressure |
|---|---|---|---|
| | % of URL for every sensor | | |
| 400 mbar (6 psi) | $T_{total}$ = ±0.215<br>$T_{span}$ = ±0.2<br>$T_{zero\ point}$ = ±0.015 | $T_{total}$ = ±0.43<br>$T_{span}$ = ±0.4<br>$T_{zero\ point}$ = ±0.03 | Calculation (mbar, bar or psi):<br>$T_{Diff} = \sqrt{\left(\frac{T_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{T_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016474<br>Percentage calculation of URL dP:<br>$T_{Diff}\,[\%] = \frac{T_{Diff} \cdot 100}{P_{Diff}}$<br>A0016475 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | $T_{total}$ = ±0.101<br>$T_{span}$ = ±0.1<br>$T_{zero\ point}$ = ±0.01 | $T_{total}$ = ±0.42<br>$T_{span}$ = ±0.4<br>$T_{zero\ point}$ = ±0.02 | |

**Total performance**

The "Total performance" specification comprises the non-linearity including hysteresis, non-reproducibility as well as the thermal change in the zero point. All specifications apply to the temperature range −10 to +60 °C (+14 to +140 °F).

| Measuring cell | % of URL for every sensor | Calculated total performance ($TP_{Diff}$) of the differential pressure |
|---|---|---|
| 400 mbar (6 psi) | TP = ±0.25<br>TP = ±0.34 [1] | Calculation (mbar, bar or psi):<br>$TP_{Diff} = \sqrt{\left(\frac{TP_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{TP_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016470<br>Percentage calculation of URL dP:<br>$TP_{Diff}\,[\%] = \frac{TP_{Diff} \cdot 100}{P_{Diff}}$<br>A0016471 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | TP = ±0.15<br>TP = ±0.25 [1] | |

1) For hygienic process connections

The "Applicator Sizing Electronic dp" selection tool, available free of charge on the Endress +Hauser web site (www.endress.com/applicator), enables detailed calculations for your respective applications.

**Long-term stability**

| | 1 year | 5 years | 10 years | Calculated long-term stability ($L_{Diff}$) of the differential pressure |
|---|---|---|---|---|
| Measuring ranges | % of URL for every sensor | | | |
| 400 mbar (6 psi) | L = ±0.035<br>L = ±0.25 [1] | L = ±0.14 | L = ±0.32 | Calculation (mbar, bar or psi):<br>$L_{Diff} = \sqrt{\left(\frac{L_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{L_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016463<br>Percentage calculation of URL dP/year:<br>$L_{Diff}\,[\%] = \frac{L_{Diff} \cdot 100}{P_{Diff}}$<br>A0016464 |
| 1 bar (15 psi) | L = ±0.020<br>L = ±0.1 [1] | L = ±0.08 | L = ±0.180 | |
| 2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi) | L = ±0.025<br>L = ±0.1 [1] | L = ±0.05 | L = ±0.075 | |
| 40 bar (600 psi) | L = ±0.025<br>L = ±0.1 [1] | L = ±0.075 | L = ±0.100 | |

1) For hygienic process connections

**Total error**

The total error comprises the total performance and long-term stability. All specifications apply to the temperature range −10 to +60 °C (+14 to +140 °F).

| Measuring cell | % of URL/year for every sensor | Calculated total error ($TE_{Diff}$) of the differential pressure |
|---|---|---|
| 400 mbar (6 psi) | TE = ±0.30 | Calculation (mbar, bar or psi):<br>$TE_{Diff} = \sqrt{\left(\frac{TE_{HP}}{100} \cdot URL_{HP}\right)^2 + \left(\frac{TE_{LP}}{100} \cdot URL_{LP}\right)^2}$<br>A0016472<br>Percentage calculation of URL dP:<br>$TE_{Diff}\,[\%] = \frac{TE_{Diff} \cdot 100}{P_{Diff}}$<br>A0016473 |
| 1 bar (15 psi)<br>2 bar (30 psi)<br>4 bar (60 psi)<br>10 bar (150 psi)<br>40 bar (600 psi) | TE = ±0.20 | |

**Warm-up time**

4 to 20 mA HART : < 10 s

# Mounting

- Moisture must not penetrate the housing when mounting the device, establishing the electrical connection and during operation.
- When measuring in media containing solids, such as dirty liquids, installing separators and drain valves is useful for capturing and removing sediment.
- Point the cable and connector downwards where possible to prevent moisture from entering (e.g. rain or condensation water).

## Mounting location

The FMD71/FMD72 is best suited to level measurement in vessels with pressure overlay or in vacuum vessels and tanks, high distillation columns and other vessels with changing ambient temperatures.

The sensor module HP is mounted on the lower measuring connection and the sensor module LP is mounted above the maximum level. The transmitter can be mounted on pipes or walls with the mounting bracket.

## Orientation

- Transmitter: Any orientation.
- Sensor modules: The orientation can cause a zero point shift .
  This position-dependent zero point shift can be corrected directly at the device via the operating key, and also in hazardous areas in the case of devices with external operation (position adjustment).

## General installation instructions

**Mounting the sensor modules and transmitter is very easy**

- The housings of the sensor modules can be rotated up to 360°.
- The transmitter is freely rotatable in the mounting bracket.

The sensor modules and transmitter can be easily aligned when mounted.

**Your benefits**


- Easy mounting due to optimum alignment of housing
- Easily accessible device operation
- Optimum readability of the onsite display (optional)
- Easy pipe installation due to optional alignment of the modules.

## Thermal insulation - FMD71 high-temperature version

The FMD71 high-temperature version may only be insulated up to a certain height. The maximum permitted insulation height is indicated on the devices and applies to an insulation material with a heat conductivity ≤ 0.04 W/(m x K) and to the maximum permitted ambient and process temperature. The insulation height is not indicated on hygienic connections.

- Ambient temperature ($T_A$): ≤ 70 °C (158 °F)
- Process temperature ($T_P$): ≤ 150 °C (302 °F)

The data were determined under the most critical application "quiescent air".

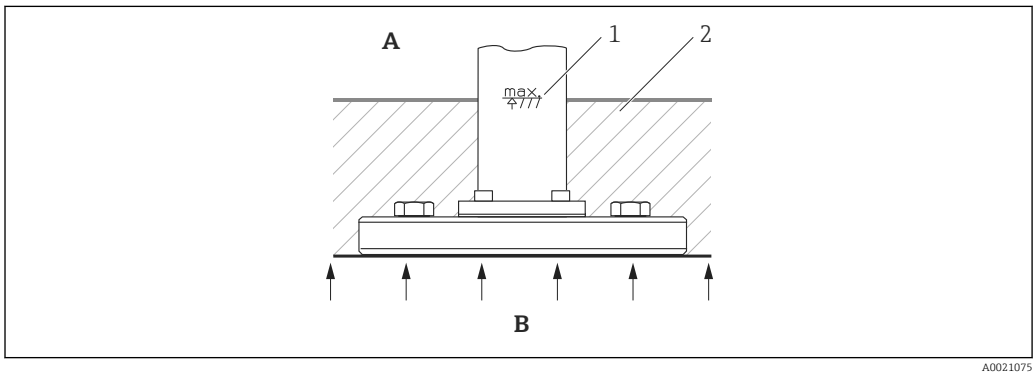


A0021075

*A Ambient temperature*
*B Process temperature*
*1 Insulation height*
*2 Insulation material*

## Installing the sensor modules

### General installation instructions

- Due to the orientation of the sensor modules, there may be a shift in the zero point, i.e. when the vessel is empty or partially full, the measured value does not display zero.
- Always install the sensor module HP below the lowest measuring point.
- Always install the sensor module LP above the highest measuring point.
- Do not mount the sensor modules in the filling curtain or at a point in the tank which could be affected by pressure pulses from an agitator.
- Do not mount the sensor modules in the suction area of a pump.
- The adjustment and functional test can be carried out more easily if you mount the sensor modules downstream of a shutoff device.
- Mounting bracket available to order as option:
  Product Configurator order code for "Enclosed accessories", option "PA" or as separate accessory (part number: 71102216)


## Mounting sensor modules with PVDF installation coupling

**⚠ WARNING**

**Risk of damage to process connection!**
Risk of injury!

▶ Sensor modules with PVDF process connections with threaded connection must be installed with the mounting bracket provided!

The mounting bracket can be installed on pipes with a diameter of 1¼" to 2" or on walls.

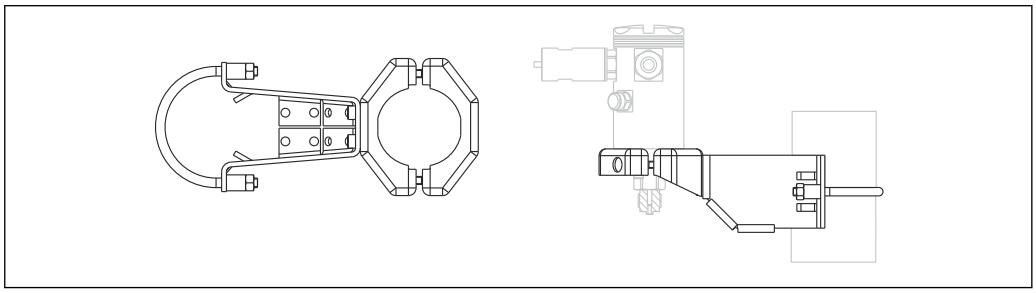


A0017514

- The mounting bracket can be ordered as an optional extra
- Dimensions → 🖹 53.

## Installing the transmitter

The transmitter is installed with the mounting bracket supplied. The mounting bracket can be installed on pipes with a diameter of 1¼" to 2" or on walls.

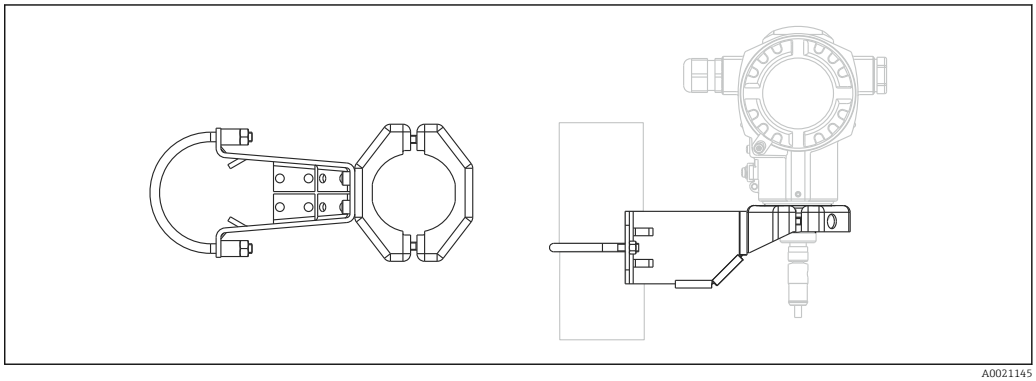

A0021145

- The mounting bracket is included in the delivery.
- Dimensions → 🖹 53.

## Sensor and transmitter cable

| Designation | Length | Option [1] |
|---|---|---|
| Sensor cable PE-X | 1.82 m (6 ft) | BC |
| | 4.57 m (15 ft) | CC |

| Designation | Length | Option [1] |
|---|---|---|
| | 10.67 m (35 ft) | DC |
| | 30.48 m (100 ft) | FC |
| | 45.72 m (150 ft) | GC |
| Transmitter cable PE-X | 1.82 m (6 ft) | BC |
| | 4.57 m (15 ft) | CC |
| | 10.67 m (35 ft) | DC |

1) Product Configurator order code for "Cable length"

**Technical data for PE-X cable:**
- Temperature resistance: −40 to +80 °C (−40 to +176 °F)
- Flame resistance: to DIN 60332-1-2 and DIN EN 50266-2-5
- Halogen-free: to DIN VDE 0472 part 815
- Oil resistance: to DIN EN 60811-2-1
- Other: UV-resistant to DIN VDE 0276-605
- Bending radius: min. 34 mm (1.34 in), permanently installed

Cable shortening kit: SD00354P/00

The cable shortening kit is included in the delivery.

# Environment

**Ambient temperature range**

- Without onsite display: −40 to +80 °C (−40 to +176 °F)
- With onsite display: −20 to +70 °C (−4 to +158 °F)
  Extended temperature operation range with limitations in optical properties, such as display speed and contrast. −40 to +80 °C (−40 to +176 °F)

For devices for use in hazardous areas, see Safety Instructions .

The device can be used in this temperature range. The values of the specification, such as thermal change, may be exceeded.

**Storage temperature**

−40 to +80 °C (−40 to +176 °F)

**Climate class**

Class 4K4H (air temperature: −20 to +55 °C (−4 to +131 °F), relative humidity: 4 to 100 %) fulfilled as per DIN EN 60721-3-4 (condensation possible)

**Degree of protection**

IP66/68 NEMA 4x/6P

Degree of protection IP 68: 1.83 mH2O for 24 h

**Vibration resistance**

| Housing | Test standard | Vibration resistance |
|---|---|---|
| Aluminum and steel housing | IEC 61298-3 | guaranteed for:<br>10 to 60 Hz: ±0.15 mm (±0.0059 in);<br>60 to 500 Hz: 2 g in all 3 planes |

**Electromagnetic compatibility (EMC)**

- Electromagnetic compatibility as per EN 61326 Appendix A and NAMUR Recommendation EMC (NE21). For details, refer to the Declaration of Conformity.
- Maximum deviation: < 0.5 % of span
- All EMC measurements were performed with a turn down (TD) = 2:1.
- If HART communication is used: The use of shielded cables is recommended in environments with increased electromagnetic interference.

# Process

**Process temperature range for devices with ceramic process membrane FMD71**

- Thread and flanges: −25 to +125 °C (−13 to +257 °F)
- Hygienic connections:−25 to +130 °C (−13 to +266 °F) , 150 °C (302 °F) for max. 60 minutes
- High-temperature version: −15 to +150 °C (+5 to +302 °F); see ordering information, order code 610, option "NB".
- For saturated steam applications, use a device with a metallic process membrane, or provide a siphon for temperature isolation when installing.
- Observe the process temperature range of the seal. See also the following table.

| Seal | Notes | Process temperature range | | Option [1] |
|---|---|---|---|---|
| | | Threaded connection or flange | Hygienic process connections | |
| FKM | - | −25 to +125 °C (−13 to +257 °F)/ 150 °C (302 °F) [2] | - | A |
| FKM | FDA [3], 3A Class I, USP Class VI | −5 to +125 °C (+23 to +257 °F) | −5 to +150 °C (+23 to +302 °F) | B |
| FFKM Perlast G75LT | - | −20 to +125 °C (−4 to +257 °F) | −20 to +150 °C (−4 to +302 °F) | C |
| Kalrez, Compound 4079 | - | +5 to +125 °C (+41 to +257 °F)/ 150 °C (302 °F) [2] | - | D |
| NBR | FDA [3] | −10 to +100 °C (+14 to +212 °F) | - | F |
| NBR, low temperature | - | −40 to +100 °C (−40 to +212 °F) | - | H |
| HNBR [4] | FDA [3], 3A Class II, AFNOR, BAM | −25 to +125 °C (−13 to +257 °F)/ 150 °C (302 °F) [2] | −20 to +125 °C (−4 to +257 °F) | G |
| EPDM 70 | FDA [3] | −40 to +125 °C (−40 to +257 °F) | - | J |
| EPDM 291 [4] | FDA [3], 3A Class II, USP Class VI, DVGW, KTW, W270, WRAS, ACS, NSF61 | −15 to +125 °C (+5 to +257 °F)/ 150 °C (302 °F) [2] | −15 to +150 °C (+5 to +302 °F) | K |
| FFKM Kalrez 6375 | - | +5 to +125 °C (+41 to +257 °F) | - | L |
| FFKM Kalrez 7075 | - | +5 to +125 °C (+41 to +257 °F) | - | M |
| FFKM Kalrez 6221 | FDA [3], USP Class VI | −5 to +125 °C (+23 to +257 °F) | −5 to +150 °C (+23 to +302 °F) | N |
| Fluoroprene XP40 | FDA [3], USP Class VI, 3A Class I | +5 to +125 °C (+41 to +257 °F)/ 150 °C (302 °F) [2] | +5 to +150 °C (+41 to +302 °F) | P |
| VMQ silicone | FDA [3] | −35 to +85 °C (−31 to +185 °F) | −20 to +85 °C (−4 to +185 °F) | S |
| The process temperature ranges indicated here refer to the permanent operation of the FMD71. In the case of devices with hygienic process connections, a higher temperature (max. 150 °C (302 °F)) may be applied for a short period (max. 60 min.) for cleaning purposes. | | | | |

1) Product Configurator, order code for "Seal"
2) 150 °C (302 °F) for high-temperature version
3) Food-safe FDA 21 CFR 177.2600
4) These seals are used for devices with 3A-approved process connections.

### Applications with changes in temperature

Frequent extreme changes in temperatures can temporarily cause measurement errors. Temperature compensation occurs after a few minutes. The smaller the change in temperature and the longer the time interval involved, the faster internal temperature compensation occurs.

**Process temperature range for devices with metallic process membrane FMD72**

| Device | Limits |
|---|---|
| Process connections with internal process membrane | −40 to +125 °C (−40 to +257 °F) |
| Process connections with flush process membrane | −40 to +100 °C (−40 to +212 °F) |
| Hygienic process connections with flush process membrane | −40 to +130 °C (−40 to +266 °F)<br>For a maximum of 60 minutes: +150 °C (+302 °F) |

**Process pressure range**

**Pressure specifications**

**WARNING**

**The maximum pressure for the device depends on the lowest-rated component with regard to pressure (components are: process connection, optional mounted parts or accessories).**

- For pressure specifications, see the "Measuring range" section and the "Mechanical construction" section.
- Only operate the device within the specified limits for the components!
- MWP (maximum working pressure): The maximum working pressure is specified on the nameplate. This value refers to a reference temperature of +20 °C (+68 °F) and may be applied to the device for an unlimited time. Note temperature dependence of maximum working pressure. For flanges, refer to the following standards for the permitted pressure values at higher temperatures: EN 1092-1 (with regard to their stability/temperature property, the materials 1.4435 and 1.4404 are grouped together under EN 1092-1; the chemical composition of the two materials can be identical.), ASME B 16.5a, JIS B 2220 (the latest version of the standard applies in each case). Maximum working pressure data that deviate from this are provided in the relevant sections of the Technical Information.
- The test pressure corresponds to the overload limit of the individual sensors (overpressure limit OPL = 1.5 x MWP (formula does not apply to the FMD72 with a 40 bar (600 psi) measuring cell)) and may be applied for a limited period only to ensure that no lasting damage occurs.
- The Pressure Equipment Directive (2014/68/EU) uses the abbreviation "PS". The abbreviation "PS" corresponds to the MWP (maximum working pressure) of the device.
- In the case of measuring cell range and process connection combinations where the overpressure limit (OPL) of the process connection is less than the nominal value of the measuring cell, the device is set at the factory, at the very maximum, to the OPL value of the process connection. If the entire measuring cell range must be used, select a process connection with a higher OPL value (1.5 x PN; MWP = PN).
- Devices with ceramic process membrane: Avoid steam hammering! Steam hammering can cause zero point drift. Recommendation: Residue (such as condensation or drops of water) can remain on the process membrane after CIP cleaning and lead to local steam hammering if steam cleaning is performed again. In practice, drying the process membrane (e.g. by blowing off excess moisture) has proven to be a successful way of avoiding steam hammering.


# Mechanical construction

## Device height


**The device height is calculated from**

- the height of the housing and
- the height of the individual process connection.

The individual heights of the components are listed in the following sections. To calculate the device height simply add up the individual heights of the components. Where applicable also take into consideration the installation distance (space that is used to install the device). You can use the following table for this purpose:
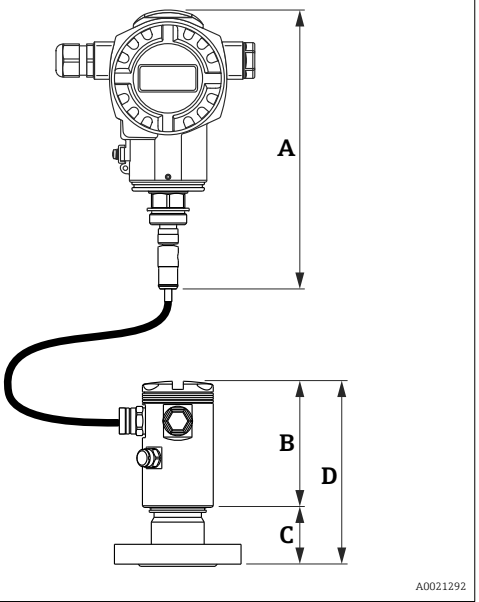
| Section | Page | Height | Example |
|---|---|---|---|
| Transmitter height | → 29 ff. | (A) |  |
| Sensor height | → 30 | (B) | |
| Process connections | → 31 | (C) | |
| Installation distance | - | (D) | |
| Device height | | | |

**T14 transmitter housing (optional display on the side)**

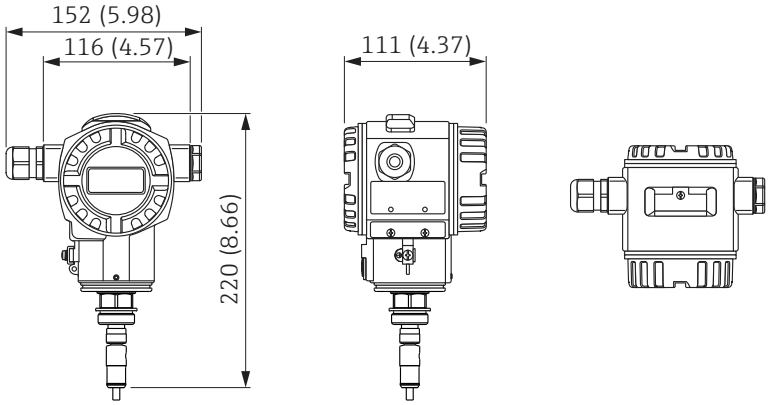



Engineering unit mm (in)

| Material | Degree of protection | Cable entry | Weight kg (lbs) | | Option [1] |
|---|---|---|---|---|---|
| | | | With display | Without display | |
| Aluminum | IP66/68 NEMA 4x/6P | ▪ M20<br>▪ G ½"<br>▪ NPT ½" | 1.7 (3.75) | 1.6 (3.53) | A |
| Stainless steel | IP66/68 NEMA 4x/6P | ▪ M20<br>▪ G ½"<br>▪ NPT ½" | 2.6 (5.73) | 2.5 (5.51) | B |

1) Product Configurator, order code for "Housing transmitter"

**T17 transmitter housing (optional display on the side)**

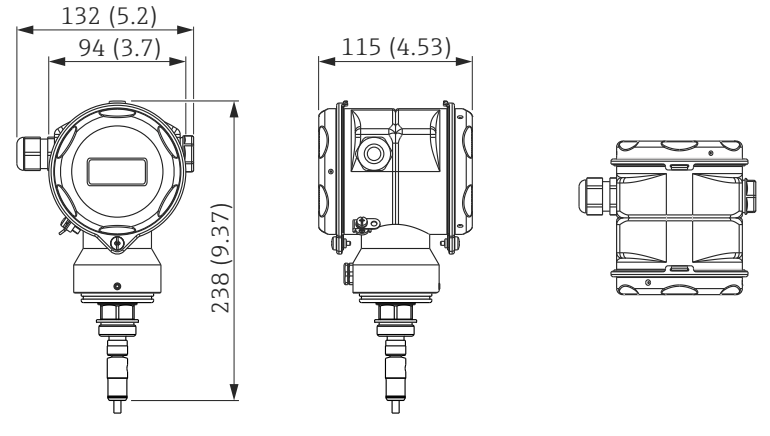



Engineering unit mm (in)

| Material | Degree of protection | Cable entry | Weight kg (lbs) | | Option [1] |
|---|---|---|---|---|---|
| | | | with display | without display | |
| 316L | IP66/68 NEMA 6P | ▪ M20<br>▪ G ½"<br>▪ NPT ½" | 2.6 (5.73) | 2.5 (5.51) | C |

1) Product Configurator order code for "Transmitter housing"

## Sensor housing

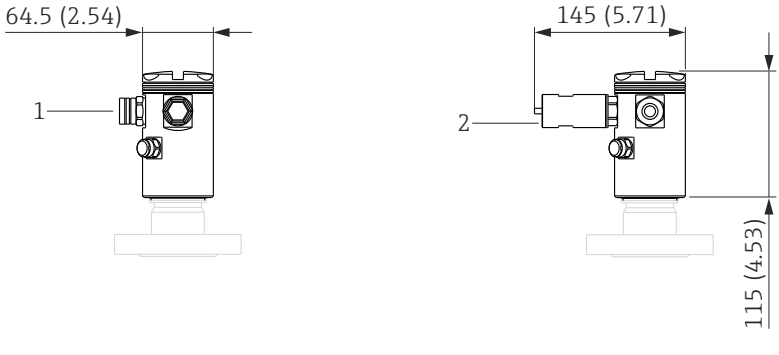


*1 With M20 cable entry*
*2 With NPT ½" thread*

Engineering unit mm (in)

| Material | Degree of protection | Cable entry | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| Aluminum | IP66/68 NEMA 4x/6P | ▪ M20 cable entry<br>▪ NPT ½" | 0.6 (1.32) | A |
| Stainless steel | IP66/68 NEMA 4x/6P | ▪ M20 cable entry<br>▪ NPT ½" | 1.35 (2.98) | B |

1) Product Configurator order code for "Sensor module housing"

## Selecting the electrical connection

There is a dependency between the cable entries of the transmitter housing and those of the sensor module housing.

Different cable entries are available in the sensor module housing depending on the cable entry selected for the transmitter housing (see the following table):

| Cable entry Transmitter housing | Cable entry Sensor module housing | Option [1] |
|---|---|---|
| M20 cable entry | M20 cable entry | A |
| Thread G ½" | M20 cable entry | C |
| Thread NPT ½" | Thread NPT ½" | D |


1) Product Configurator order code for "Electrical connection"

## Explanation of terms

- DN or NPS or A = alphanumeric designation of the flange size
- PN or Class or K = alphanumeric pressure rating of a component

**Process connections FMD71, internal process membrane**

**DIN 13 thread**

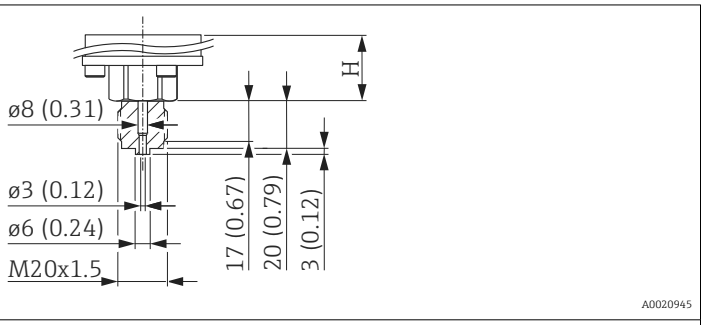


Engineering unit mm (in)


| Designation | Material | Weight | Option [1] |
|---|---|---|---|
| | | kg (lbs) | |
| DIN 13 M20 x 1.5, EN 837<br>3 mm (0.12 in) | AISI 316L | 0.63 (1.39) | G1J |
| | Alloy C276 (2.4819) | | G2C |

1) Product Configurator, order code for "Process connection"

| Description | Height H |
|---|---|
| Standard height | 29 mm (1.14 in) |
| High-temperature version | 107 mm (4.21 in) |

**Process connections FMD71, internal membrane**

**ISO 228 G thread**

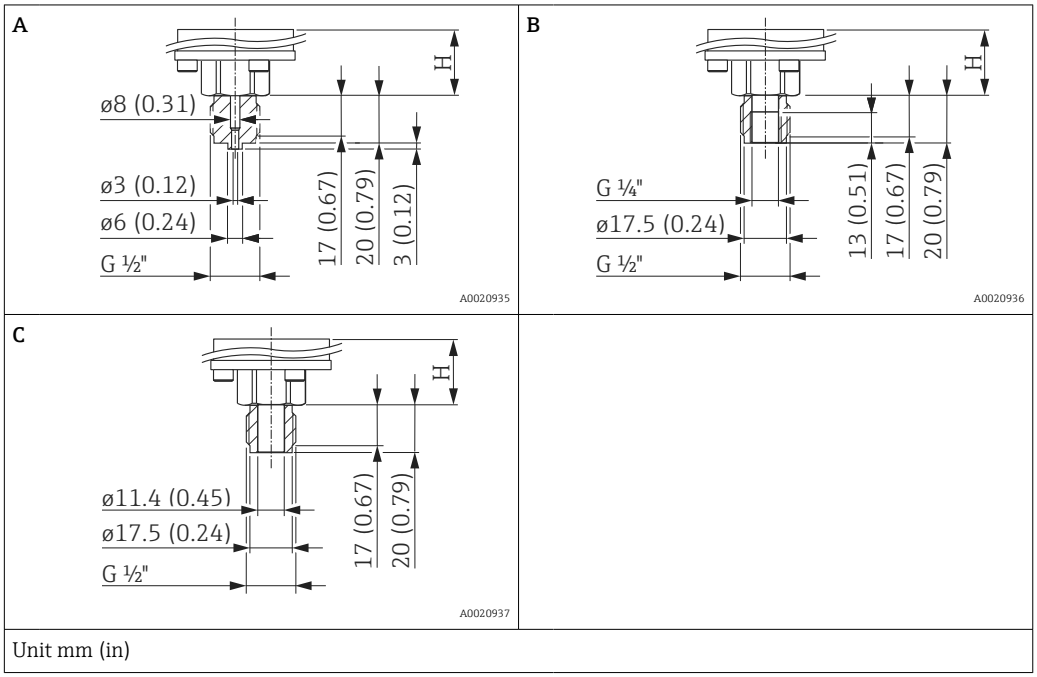


Unit mm (in)


| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A | ISO 228 G ½" A EN 837 thread | AISI 316L | 0.63 (1.39) | GCJ |
| | | Alloy C276 (2.4819) | | GCC |
| | | Monel (2.4360) | | GCD |
| | | **PVDF**<br>▪ Mount only with mounting bracket<br>▪ MWP 10 bar (150 psi), OPL max. 15 bar (225 psi)<br>▪ Process temperature range: −10 to +60 °C (+14 to +140 °F) | | GCF |
| B | ISO 228 G ½" A thread, G ¼" thread (female) | AISI 316L | | GLJ |
| | | Alloy C276 (2.4819) | | GLC |
| | | Monel (2.4360) | | GLD |
| C | ISO 228 G ½" A thread, bore hole 11.4 mm (0.45 in) | AISI 316L | | GMJ |
| | | Alloy C276 (2.4819) | | GMC |
| | | Monel (2.4360) | | GMD |

1) Product Configurator, order code for "Process connection"

| Description | Height H |
|---|---|
| Standard height | 29 mm (1.14 in) |
| High-temperature version | 107 mm (4.21 in) |

**Process connections FMD71, internal membrane**

**ANSI thread**

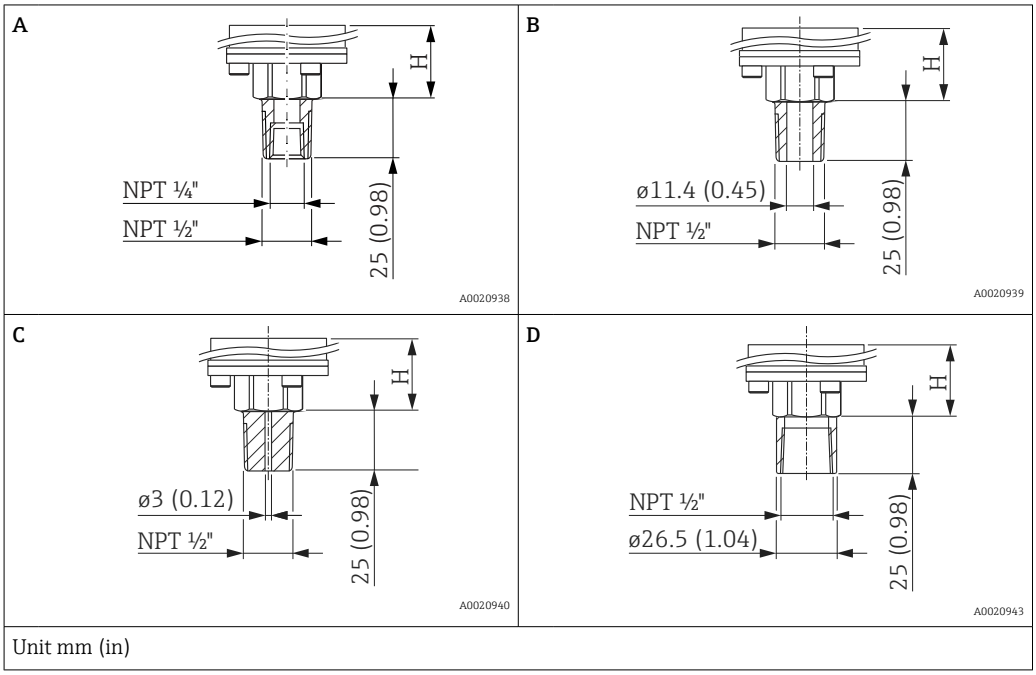


Unit mm (in)


| Item | Designation | Material | Weight<br>kg (lbs) | Option [1] |
|---|---|---|---|---|
| A | ANSI ½" MNPT, ¼" FNPT | AISI 316L | 0.63 (1.39) | RLJ |
| | | Alloy C276 (2.4819) | | RLC |
| | | Monel (2.4360) | | RLD |
| B | ANSI ½" MNPT, bore hole 11.4 mm (0.45 in) | AISI 316L | | RKJ |
| | | Alloy C276 (2.4819) | | RKC |
| | | Monel (2.4360) | | RKD |
| C | ANSI ½" MNPT, bore hole 3 mm (0.12 in) | **PVDF**<br>▪ Mount only with mounting bracket<br>▪ MWP 10 bar (150 psi), OPL max. 15 bar (225 psi)<br>▪ Process temperature range: −10 to +60 °C (+14 to +140 °F) | | RJF |
| D | ANSI ½" FNPT 11.4 mm (0.45 in) | AISI 316L | | R1J |
| | | Alloy C276 (2.4819) | | R1C |
| | | Monel (2.4360) | | R1D |

1) Product Configurator, order code for "Process connection"

| Description | Height H |
|---|---|
| Standard version | 29 mm (1.14 in) |
| High-temperature version | 107 mm (4.21 in) |

## Process connections FMD71, flush membrane

### ANSI thread

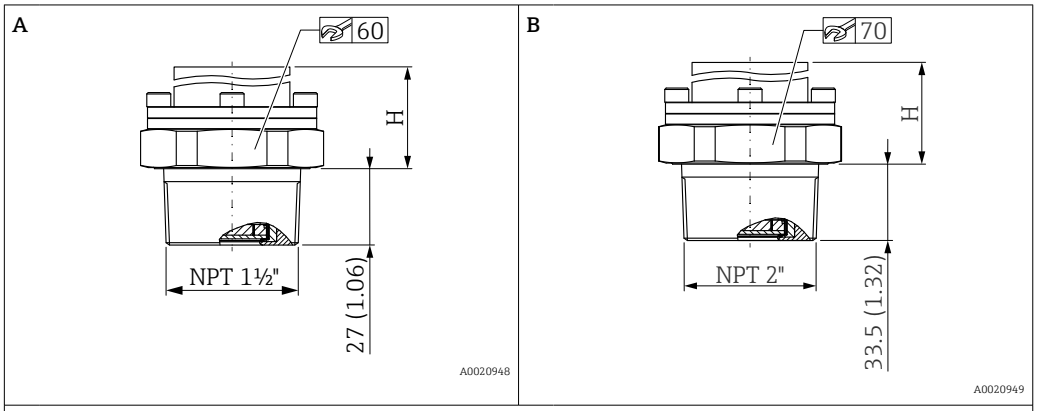


Unit mm (in)


| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A | ANSI 1 ½" MNPT | AISI 316L | 0.63 (1.39) | U7J |
| | | Alloy C276 (2.4819) | | U7C |
| | | Monel (2.4360) | | U7D |
| B | ANSI 2" MNPT | AISI 316L | | U8J |
| | | Alloy C276 (2.4819) | | U8C |
| | | Monel (2.4360) | | U8D |

1) Product Configurator, order code for "Process connection"

| Item | Description | Height H |
|---|---|---|
| A | Standard version | 57 mm (2.24 in) |
| | High-temperature version | 64 mm (2.52 in) |
| B | Standard version | 54 mm (2.13 in) |
| | High-temperature version | 61 mm (2.4 in) |

**Process connections FMD71, flush process membrane**

**DIN 13 thread**

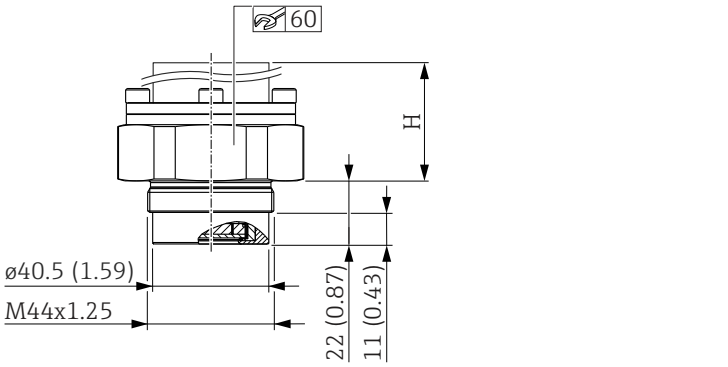


Engineering unit mm (in)


| Designation | Material | Weight | Option [1] |
|---|---|---|---|
| | | kg (lbs) | |
| DIN 13 M44 x 1.25 | AISI 316L | 0.63 (1.39) | G4J |
| | Alloy C276 (2.4819) | | G4C |

1) Product Configurator, order code for "Process connection"

| Description | Height H |
|---|---|
| Standard version | 62 mm (2.44 in) |
| High-temperature version | 69 mm (2.72 in) |

**Process connections FMD71, flush process membrane**

**ISO 228 G thread**

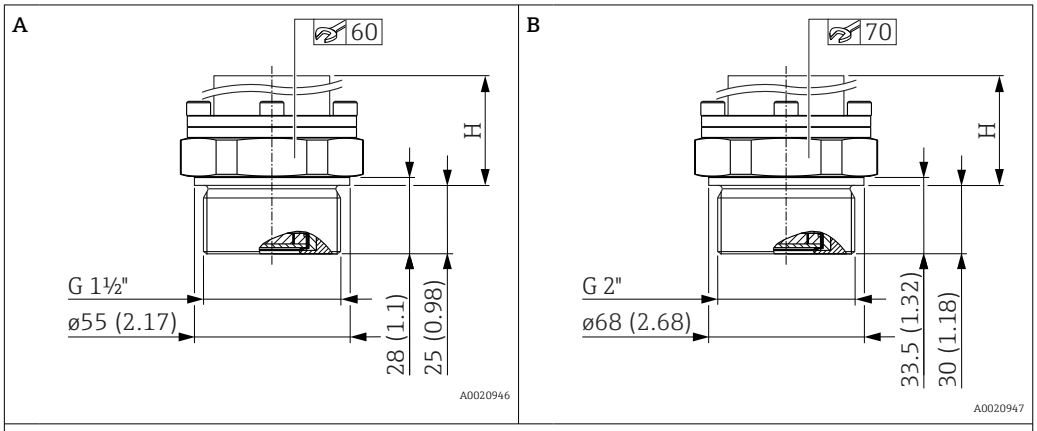



Engineering unit mm (in)

| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A | ISO 228 G 1 ½" A thread | AISI 316L | 0.63 (1.39) | GVJ |
| | | Alloy C276 (2.4819) | | GVC |
| | | Monel (2.4360) | | GVD |
| B | ISO 228 G 2" A thread | AISI 316L | | GWJ |
| | | Alloy C276 (2.4819) | | GWC |
| | | Monel (2.4360) | | GWD |

1) Product Configurator, order code for "Process connection"

| Item | Description | Height H |
|---|---|---|
| A | Standard version | 59 mm (2.32 in) |
| | High-temperature version | 66 mm (2.6 in) |
| B | Standard version | 54 mm (2.13 in) |
| | High-temperature version | 61 mm (2.4 in) |

**FMD71 hygiene** **Hygienic process connections with flush membrane**

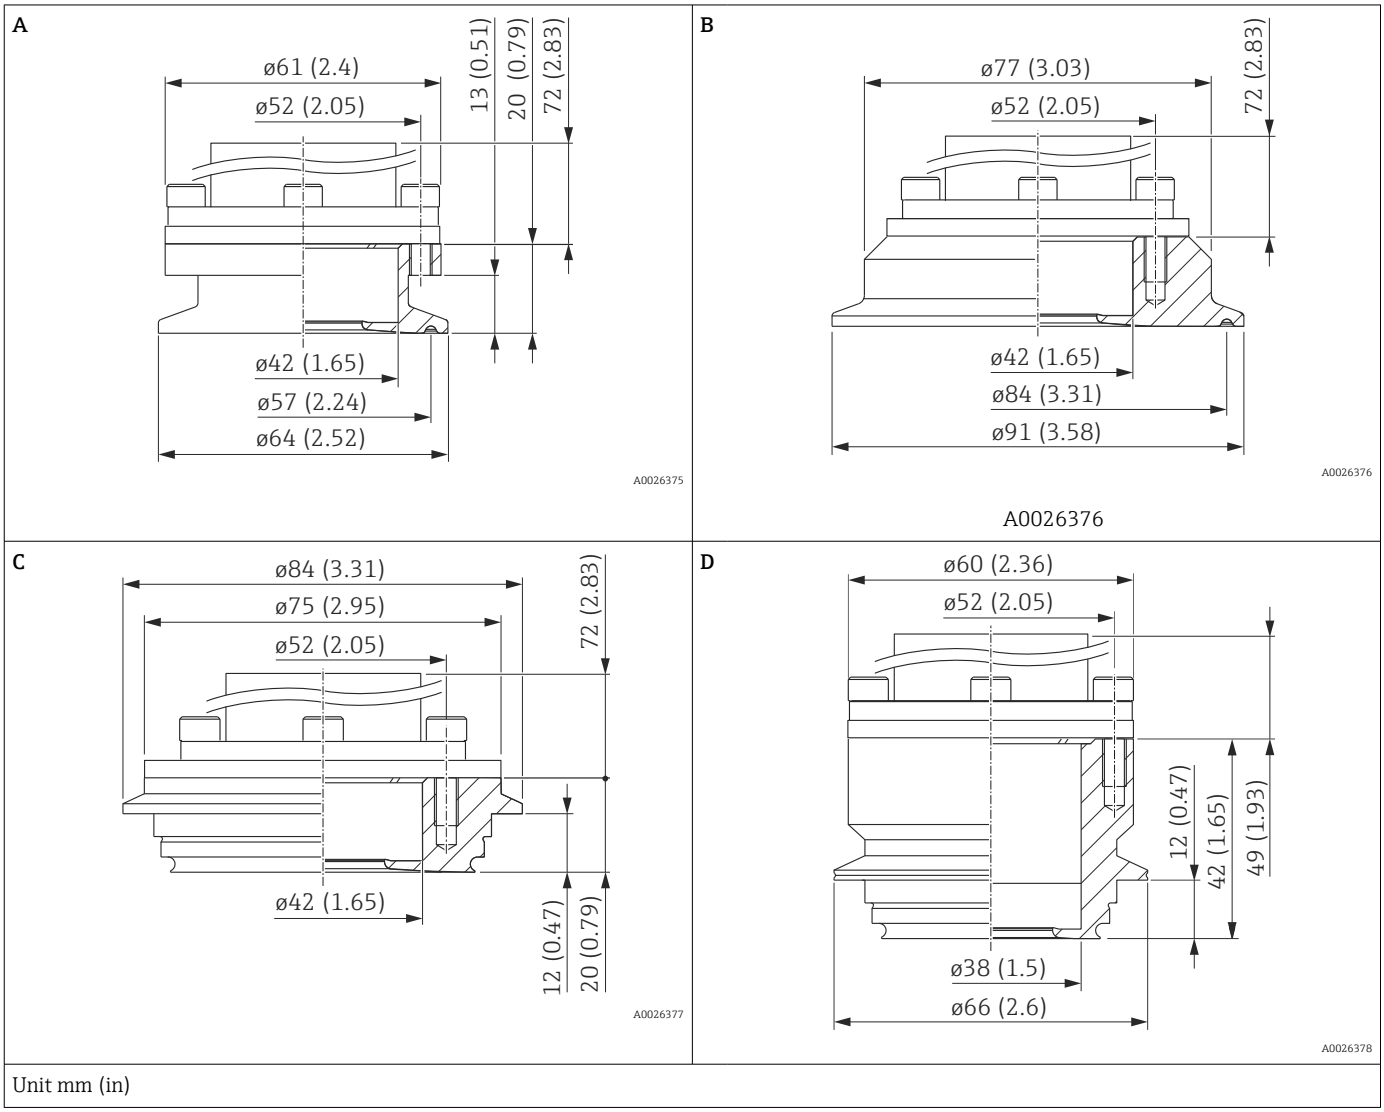



Unit mm (in)


| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A [2] | Tri-Clamp ISO 2852 DN 40 – DN 51 (2"), DIN 32676 DN50, EHEDG, 3A | AISI 316L (1.4435) | 0.7 (1.54) | TDJ |
| B | Tri-Clamp ISO 2852 DN76.1 (3"), EHEDG, 3A, with FDA seal | | 0.9 (1.98) | TFJ |
| C [2] | Varivent Type N for pipes 40 – 162, PN40, EHEDG, 3A | | 1 (2.21) | TRJ |
| D | Varivent Type F for pipes DN25-32 PN40, 316L, EHEDG, 3A, with FDA seal | | 0.46 (1) | TQJ |

1) Product Configurator, oder code for "Process connection"
2) Roughness of wetted surfaces $R_a$ < 0.76 µm (30 µin) as standard. Surface quality $R_a$ < 0.38 µm (15 µin) electropolished (wetted) available on request.


E

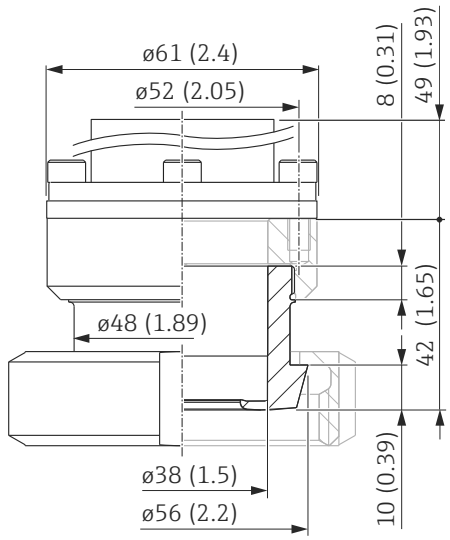



F

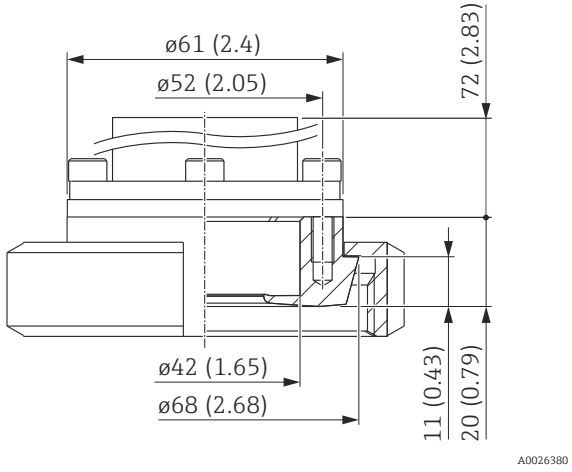


G

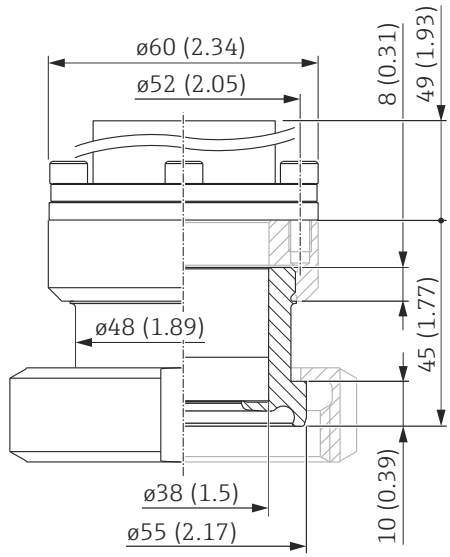


H

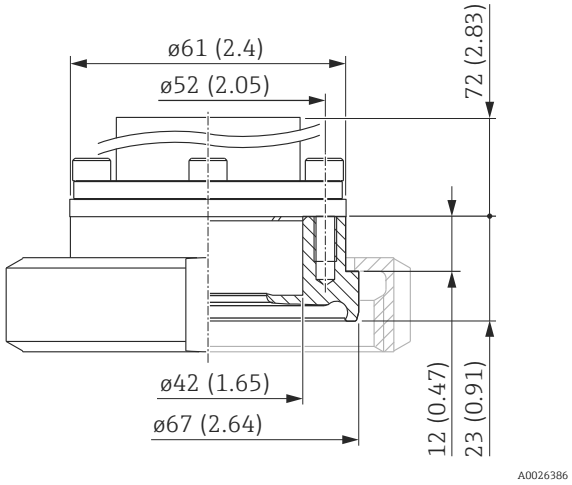



Unit mm (in)


| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| E | DIN 11851 DN40 PN25, EHEDG, 3A | AISI 316L (1.4435) | 0.7 (1.54) | MZJ [2] |
| F | DIN 11851 DN50 PN25, EHEDG, 3A | | 0.9 (1.98) | MRJ [2] |
| G | DIN 11864-1 A DN40 PN16 pipe DIN11866-A, slotted nut, 316L, EHEDG, 3A | | 1 (2.21) | NCJ [2] |
| H | DIN 11864-1 A DN50 PN40 pipe DIN11866-A, slotted nut, 316L, EHEDG, 3A | | 1 (2.21) | NDJ [2] |

1) Product Configurator, order code for "Process connection"
2) Endress+Hauser supplies these slotted nuts in stainless steel AISI 304 (DIN/EN material number 1.4301) or in AISI 304L (DIN/EN material number 1.4307).


I

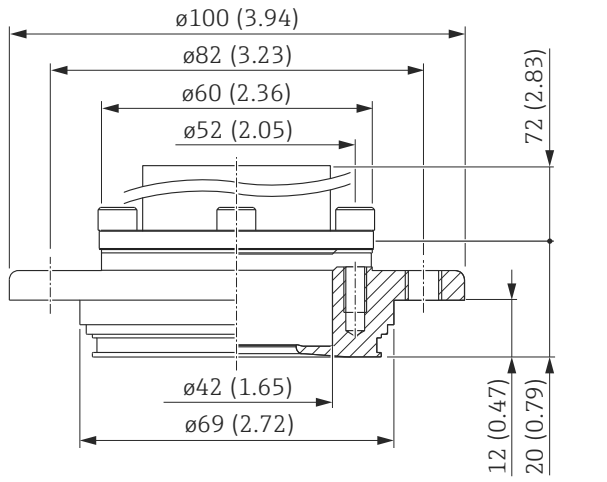


J

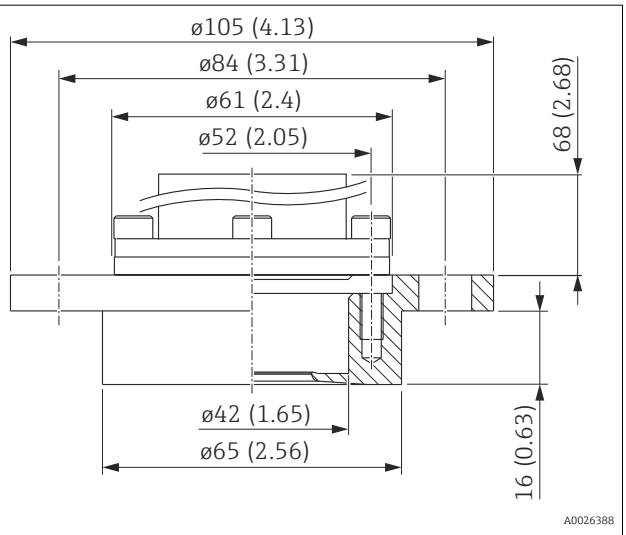


K

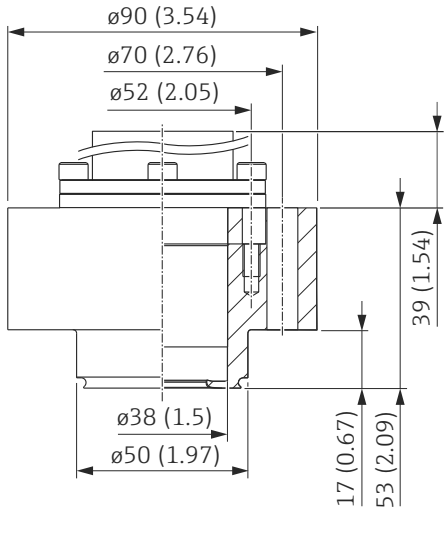



Unit mm (in)

| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| I | APV inline DN50 PN25, 316L, 3A, with FDA seal | AISI 316L (1.4435) | 1.2 (2.65) | TMJ |
| J | DRD DN50 (65 mm) PN25, slip-on flange AISI 304 (1.4301) | | 0.9 (1.98) | TIJ |
| K | NEUMO BioControl, D50, PN16, 316L, 3A | | 0.8 (1.76) | S4J |

1) Product Configurator, order code for "Process connection"

*Universal process adapter*

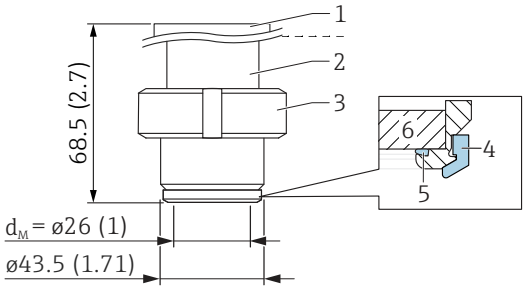


*1 Top section: AISI 316L (1.4404)*
*2 Bottom section: AISI 316L (1.4435)*
*3 Slotted nut: AISI 304 (1.4301) or AISI 304L (1.4307)*
*4 Form seal: silicone or EPDM*
*5 Measuring cell seal*
*6 Ceramic measuring cell*

Unit mm (in)

- The roughness of the surface in contact with the medium is $R_a$ <0.76 µm (30 µin).
- Silicone form seal: FDA 21CFR177.2600/USP Class VI, order number: 52023572
- EPDM form seal: FDA, USP Class VI; 5 pcs, order number: 71100719

| Designation | PN bar (psi) | Weight [kg (lb)] [2] | Option [1] |
|---|---|---|---|
| Universal process adapter<br>Form seal made of silicone | 10 (145) | 0.74 (1.63) | UPJ |
| Universal process adapter<br>Form seal made of EPDM | | | UNJ |


1) Product Configurator, order code for "Process connection"
2) Total weight consisting of the measuring cell assembly and the process connection.

| Material of the form seal (exchangeable seal) | Material of the measuring cell seal on ceramic sensor (seal not exchangeable) | Approval of measuring cell seal | Option [1] |
|---|---|---|---|
| Silicone | EPDM | FDA [2] 3A Class II, USP Class VI. DVGW, KTW, W270, WRAS, ACS, NSF61 | K |
| EPDM | EPDM | FDA [2] | J |
| | | FDA [2] 3A Class II, USP Class VI. DVGW, KTW, W270, WRAS, ACS, NSF61 | K |

1) Product Configurator, order code for "Seal"
2) Food-safe FDA 21 CFR 177.2600

**Process connections FMD71, flush membrane**

**EN flanges, connection dimensions in accordance with EN 1092-1**

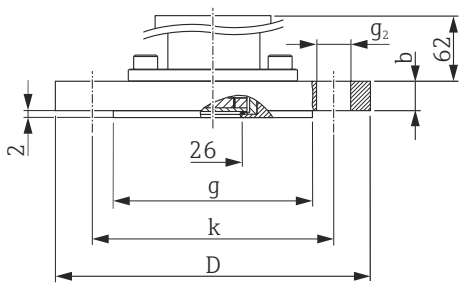


*D* *Diameter of flange*
*b* *Thickness*
*g* *Raised face*
*k* *Pitch diameter*
*$g_2$* *Diameter of hole*


Unit mm

| Flange | | | | | | | Boltholes | | | Weight | Option [1] |
|---|---|---|---|---|---|---|---|---|---|---|---|
| DN | PN | Form | Material | D | b | g | Quantity | $g_2$ | k | | |
| | | | | mm | mm | mm | | mm | mm | kg (lbs) | |
| DN 25 | PN 10-40 | B1 | AISI 316L | 115 | 18 | 68 | 4 | 14 | 85 | 1.4 (3.09) | CNJ |
| DN 32 | PN 10-40 | B1 | AISI 316L | 140 | 18 | 78 | 4 | 18 | 100 | 2 (4.41) | CPJ |
| DN 40 | PN 10-40 | B1 | AISI 316L | 150 | 18 | 88 | 4 | 18 | 110 | 2.4 (5.29) | CQJ |
| DN 40 | PN 10-40 | B1 | ECTFE [2] | 150 | 21 | 88 | 4 | 18 | 110 | 2.6 (5.73) | CQP |
| DN 50 | PN 10-40 | B1 | AISI 316L | 165 | 20 | 102 | 4 | 18 | 125 | 3.2 (7.06) | CXJ |
| DN 50 | PN 10-16 | B1 | PVDF [3] | 165 | 18 | 102 | 4 | 18 | 125 | 2.9 (6.39) | CFF |
| DN 50 | PN 25-40 | B1 | ECTFE [2] | 165 | 20 | 102 | 4 | 18 | 125 | 3.2 (7.06) | CRP |
| DN 50 | PN 63 (64) | B2 | AISI 316L | 180 | 26 | 102 | 4 | 22 | 135 | 4.6 (10.14) | PDJ |
| DN 80 | PN 10-16 | B1 | PVDF [3] | 200 | 21.4 | 138 | 8 | 18 | 160 | 1 (2.21) | CGF |
| DN 80 | PN 10-40 | B1 | AISI 316L | 200 | 24 | 138 | 8 | 18 | 160 | 5.5 (12.13) | CZJ |
| DN 80 | PN 25-40 | B1 | ECTFE [2] | 200 | 24 | 138 | 8 | 18 | 160 | 5.5 (12.13) | CSP |

1) Product Configurator, order code for "Process connection"
2) ECTFE coating on AISI 316L (1.4404). When operating in hazardous areas, avoid electrostatic charging of the plastic surfaces.
3) MWP 10 bar (150 psi), OPL max. 15 bar (225 psi); process temperature range: −10 to +60 °C (+14 to +140 °F)

**Process connections FMD71, flush membrane**

**ASME flanges, connection dimensions as per ASME B 16.5, raised face RF**

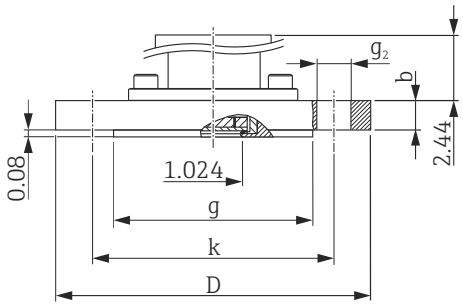


*D* *Diameter of flange*
*b* *Thickness*
*g* *Raised face*
*k* *Pitch diameter*
*$g_2$* *Diameter of hole*


Unit in

| Flange [1] | | | | | | Boltholes | | | Weight | Option [2] |
|---|---|---|---|---|---|---|---|---|---|---|
| NPS | Class | Material | D | b | g | Quantity | $g_2$ | k | | |
| in | lb./sq.in | | in | in | in | | in | in | kg (lbs) | |
| 1 | 150 | AISI 316/316L [3] | 4.25 | 1.18 | 2 | 4 | 0.62 | 3.12 | 0.9 (1.98) | ACJ |
| 1 | 300 | AISI 316/316L [3] | 4.88 | 1.18 | 2 | 4 | 0.75 | 3.5 | 1.4 (3.09) | ANJ |
| 1 ½ | 150 | AISI 316/316L [3] | 5 | 0.69 | 2.88 | 4 | 0.62 | 3.88 | 2.1 (4.63) | AEJ |
| 1 ½ | 300 | AISI 316/316L [3] | 6.12 | 0.81 | 2.88 | 4 | 0.88 | 4.5 | 2.6 (5.73) | AQJ |
| 2 | 150 | AISI 316/316L [3] | 6 | 0.75 | 3.62 | 4 | 0.75 | 4.75 | 3.0 (6.62) | AFJ |
| 2 | 150 | ECTFE [4] | 6 | 0.75 | 3.62 | 4 | 0.75 | 4.75 | 2.4 (5.29) | AFN |
| 2 | 150 | PVDF [5] | 6 | 0.75 | 3.62 | 4 | 0.75 | 4.75 | 0.5 (1.10) | AFF |
| 2 | 300 | AISI 316/316L [3] | 6.5 | 0.88 | 3.62 | 8 | 0.75 | 5 | 3.2 (7.06) | ARJ |
| 3 | 150 | AISI 316/316L [3] | 7.5 | 0.94 | 5 | 4 | 0.75 | 6 | 5.7 (12.57) | AGJ |
| 3 | 150 | ECTFE [4] | 7.5 | 0.94 | 5 | 4 | 0.75 | 6 | 4.9 (10.80) | AGN |
| 3 | 150 | PVDF [5] | 7.5 | 0.94 | 5 | 4 | 0.75 | 6 | 0.9 (1.98) | AGF |
| 3 | 300 | AISI 316/316L [3] | 8.25 | 1.12 | 5 | 8 | 0.88 | 6.62 | 6.8 (14.99) | ASJ |
| 4 | 150 | AISI 316/316L [3] | 9 | 0.94 | 6.19 | 8 | 0.75 | 7.5 | 7.8 (17.2) | AHJ |
| 4 | 150 | ECTFE [4] | 9 | 0.94 | 6.19 | 8 | 0.75 | 7.5 | 7.1 (15.66) | AHN |
| 4 | 300 | AISI 316/316L [3] | 10 | 1.25 | 6.19 | 8 | 0.88 | 7.88 | 11.6 (25.58) | ATJ |

1) AISI 316L
2) Product Configurator, order code for "Process connection"
3) Combination of AISI 316 for required pressure resistance and AISI 316L for required chemical resistance (dual rated)
4) ECTFE coating on AISI 316/316L. When operating in hazardous areas, avoid electrostatic charging of the plastic surfaces.
5) MWP 10 bar (150 psi), OPL max. 15 bar (225 psi); process temperature range: −10 to +60 °C (+14 to +140 °F)

**Process connections FMD71, flush process membrane**

**JIS flanges, connection dimensions as per JIS B 2220 BL, raised face RF**

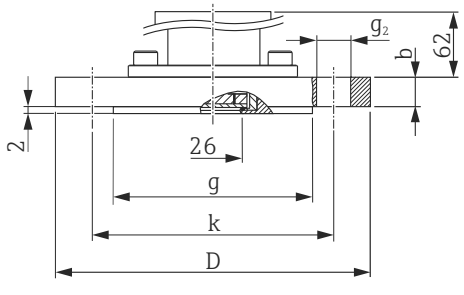


*D* *Diameter of flange*
*b* *Thickness*
*g* *Raised face*
*k* *Pitch diameter*
*$g_2$* *Diameter of hole*


Engineering unit mm

| Flange [1) 2)] | | | | | Boltholes | | | Weight | Option [3)] |
|---|---|---|---|---|---|---|---|---|---|
| A | K | D | b | g | Quantity | $g_2$ | k | | |
| | | mm | mm | mm | | mm | mm | kg (lbs) | |
| 50 A | 10 K | 155 | 16 | 96 | 4 | 19 | 120 | 2.0 (4.41) | KFJ |
| 80 A | 10 K | 185 | 18 | 127 | 8 | 19 | 150 | 3.3 (7.28) | KGJ |
| 100 A | 10 K | 210 | 18 | 151 | 8 | 19 | 175 | 4.4 (9.7) | KHJ |

1) AISI 316L (1.4435)
2) The roughness of the surface in contact with the medium including the raised face of the flanges is Ra 0.8 µm (31.5 µin). Lower surface roughness available on request.
3) Product Configurator, order code for "Process connection"

**Process connections FMD72, internal process membrane**

**ISO 228 G thread**

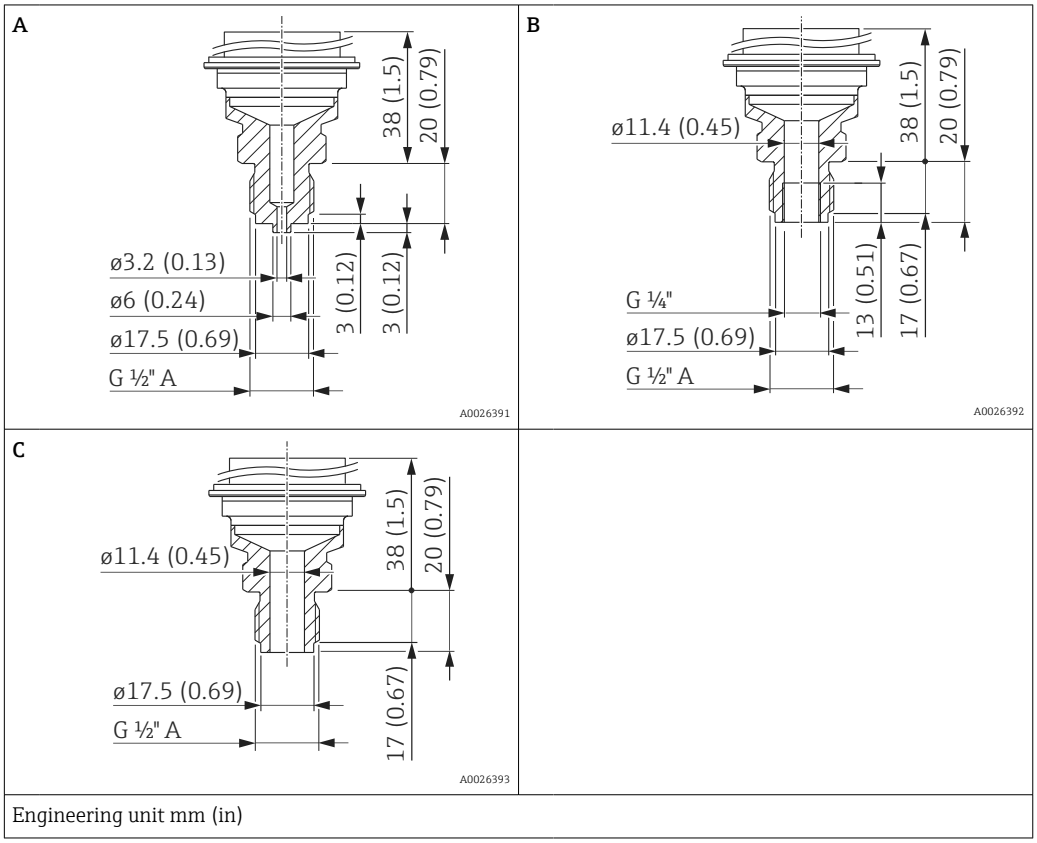



Engineering unit mm (in)

| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A | ISO 228 G ½" A EN 837 thread | AISI 316L | 0.63 (1.39) | GCJ |
| | | Alloy C276 (2.4819) | | GCC |
| B | ISO 228 G ½" A thread, G ¼" (female) EN 837 | AISI 316L | | GLJ |
| | | Alloy C276 (2.4819) | | GLC |
| C | ISO 228 G ½" A EN 837 thread, bore 11.4 mm (0.45 in) | AISI 316L | | GMJ |
| | | Alloy C276 (2.4819) | | GMC |

1) Product Configurator, order code for "Process connection"

**Process connections FMD72, internal membrane**

**ANSI thread**

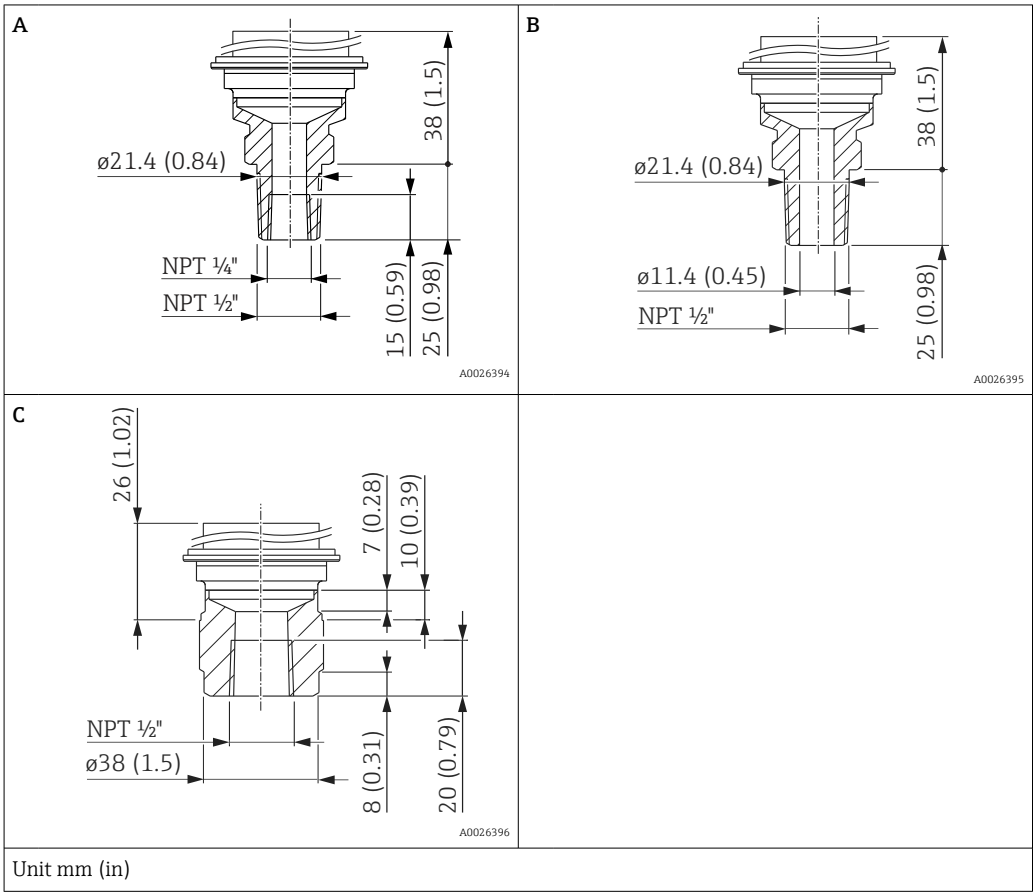



Unit mm (in)

| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A | ANSI ½" MNPT, ¼" FNPT | AISI 316L | 0.63 (1.39) | RLJ |
| | | Alloy C276 (2.4819) | | RLC |
| B | ANSI ½" MNPT, bore hole 11.4 mm (0.45 in) | AISI 316L | | RKJ |
| | | Alloy C276 (2.4819) | | RKC |
| D | ANSI ½" FNPT 11.4 mm (0.45 in) | AISI 316L | | R1J |
| | | Alloy C276 (2.4819) | | R1C |


1) Product Configurator, order code for "Process connection"

**Process connections FMD72, flush process membrane** **ISO 228 G thread**


A

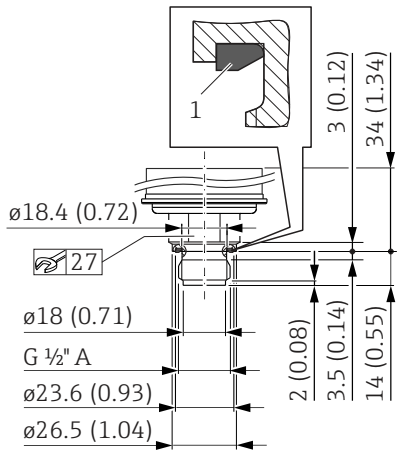



B

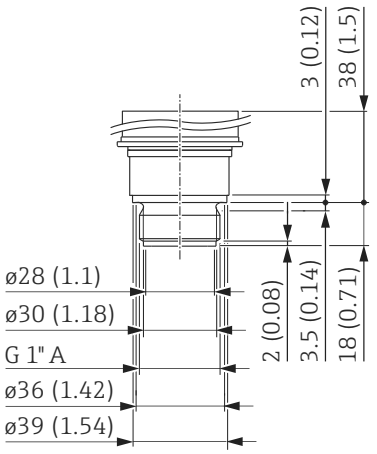


C

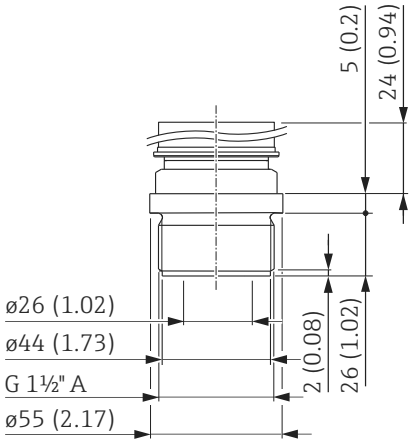


D

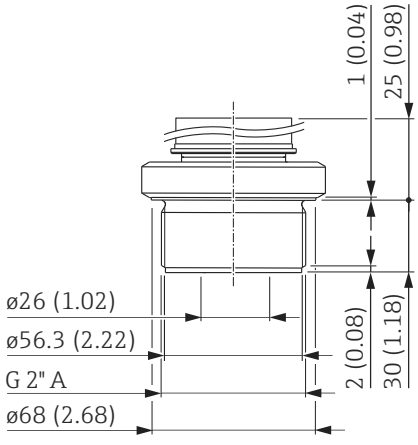



Engineering unit mm (in)

| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A | ISO 228 G ½" A thread, DIN 3852 FKM form seal (item 1) pre-installed | AISI 316L | 0.4 (0.88) | GRJ |
| B | ISO 228 G 1" A thread | AISI 316L | 0.7 (1.54) | GTJ |
| C | ISO 228 G 1 ½" A thread | AISI 316L | 1.1 (2.43) | GVJ |
| D | ISO 228 G 2" A thread | AISI 316L | 1.5 (3.31) | GWJ |

1) Product Configurator, order code for "Process connection"

**Process connections FMD72, flush membrane**

**ANSI thread**

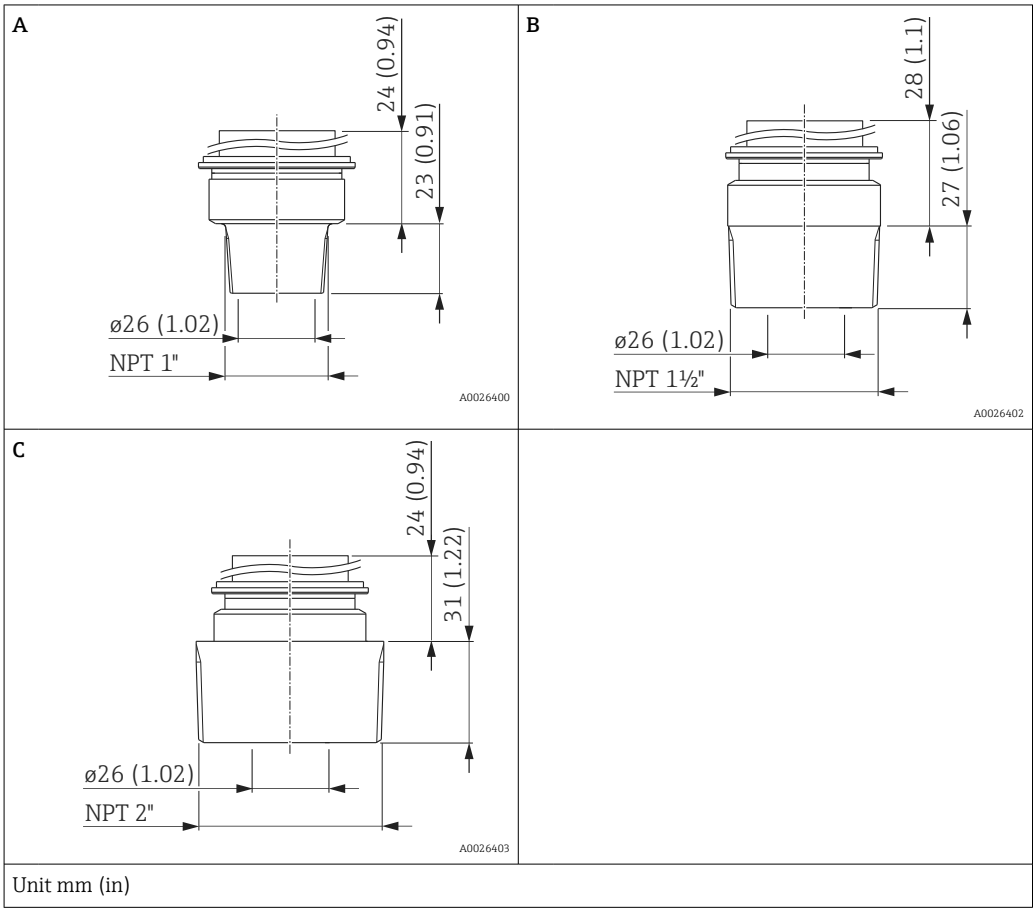



| Item | Designation | Material | Weight | Option [1] |
|---|---|---|---|---|
| | | | kg (lbs) | |
| A | ANSI 1" MNPT | AISI 316L | 0.7 (1.54) | U5J |
| B | ANSI 1 ½" MNPT | AISI 316L | 1 (2.21) | U7J |
| C | ANSI 2" MNPT | AISI 316L | 1.3 (2.87) | U8J |

1) Product Configurator, order code for "Process connection"

**Process connections FMD72, flush process membrane**

**EN flanges, connection dimensions in accordance with EN 1092-1**

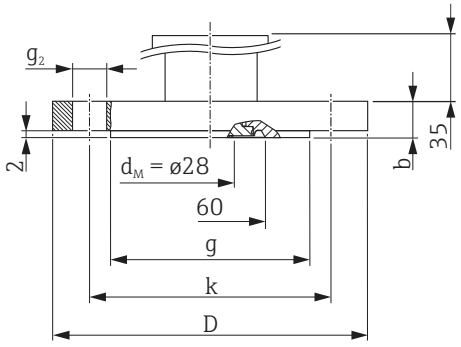


*D* *Diameter of flange*
*b* *Thickness*
*g* *Raised face*
*k* *Pitch diameter*
$g_2$ *Diameter of hole*
$d_M$ *Max. diameter of process membrane*


Engineering unit mm

| Flange [1) 2)] | | | | | | | Boltholes | | | Option [3)] |
|---|---|---|---|---|---|---|---|---|---|---|
| DN | PN | Form | D | b | g | Weight | Quantity | $g_2$ | k | |
| | | | [mm] | [mm] | [mm] | [kg (lbs)] | | [mm] | [mm] | |
| DN 25 | PN 10-40 | B1 | 115 | 18 | 68 [4)] | 1.2 (2.65) | 4 | 14 | 85 | CNJ |
| DN 32 | PN 10-40 | B1 | 140 | 18 | 78 [4)] | 1.9 (4.19) | 4 | 18 | 100 | CPJ |
| DN 40 | PN 10-40 | B1 | 150 | 18 | 88 [4)] | 2.2 (4.85) | 4 | 18 | 110 | CQJ |
| DN 50 | PN 10-40 | B1 | 165 | 20 | 102 | 3.0 (6.62) | 4 | 18 | 125 | CXJ |
| DN 80 | PN 10-40 | B1 | 200 | 24 | 138 | 5.3 (11.69) | 8 | 18 | 160 | CZJ |

1) The roughness of the surface in contact with the medium including the raised face of the flanges (all standards) is <$R_a$ 0.8 µm (31.5 µin). Lower surface roughness on request.
2) AISI 316L
3) Product Configurator, order code for "Process connection"
4) The sealing surface in these process connections is smaller than what is specified in the standard. Due to the smaller sealing surface, a special seal must be used. In this case, contact a seal manufacturer or Endress+Hauser sales office.

**Process connections FMD72, flush process membrane**

**ASME flanges, connection dimensions as per ASME B 16.5, raised face RF**

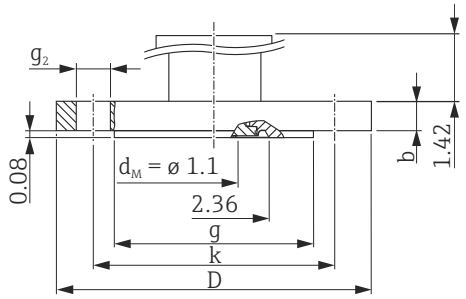


*D* *Diameter of flange*
*b* *Thickness*
*g* *Raised face*
*k* *Pitch diameter*
$g_2$ *Diameter of hole*
$d_M$ *Max. diameter of process membrane*


Engineering unit in

| Flange [1) 2)] | | | | | | Boltholes | | | Option [3)] |
|---|---|---|---|---|---|---|---|---|---|
| NPS (nominal diameter of pipe) | Class | D | b | g | Weight | Quantity | $g_2$ | k | |
| [in] | lb./sq.in | [in] | [in] | [in] | [kg (lbs)] | | [in] | [in] | |
| 1 | 150 | 4.25 | 0.61 | 2.44 | 1.1 (2.43) | 4 | 0.62 | 3.13 | ACJ [4)] |
| 1 | 300 | 4.88 | 0.69 | 2.70 | 1.3 (2.87) | 4 | 0.75 | 3.5 | ANJ |
| 1 ½ | 150 | 5 | 0.69 | 2.88 | 1.5 (3.31) | 4 | 0.62 | 3.88 | AEJ |
| 1 ½ | 300 | 6.12 | 0.81 | 2.88 | 2.6 (5.73) | 4 | 0.88 | 4.5 | AQJ |
| 2 | 150 | 6 | 0.75 | 3.62 | 2.4 (5.29) | 4 | 0.75 | 4.75 | AFJ |
| 2 | 300 | 7.5 | 0.88 | 3.62 | 3.2 (7.06) | 8 | 0.75 | 5 | ARJ |
| 3 | 150 | 7.5 | 0.94 | 5 | 4.9 (10.80) | 4 | 0.75 | 6 | AGJ |
| 3 | 300 | 8.25 | 1.12 | 5 | 6.7 (14.77) | 8 | 0.88 | 6.62 | ASJ |
| 4 | 150 | 9 | 0.94 | 6.19 | 7.1 (15.66) | 8 | 0.75 | 7.5 | AHJ |
| 4 | 300 | 10 | 1.25 | 6.19 | 11.6 (25.88) | 8 | 0.88 | 7.88 | ATJ |

1) The roughness of the surface in contact with the medium is $<R_a$ 0.8 µm (31.5 µin). Lower surface roughness on request.
2) Material AISI 316/316L (combination of AISI 316 for required pressure resistance and AISI 316L for required chemical resistance (dual rated))
3) Product Configurator, order code for "Process connection"
4) Screws must be 15 mm (0.59 in) longer than the standard flange screws.


**FMD72 hygiene** **Hygienic process connections with flush membrane**

**A**





*H Height*
*D1 Diameter*
*d Diameter of seal*
*$d_M$ Max. diameter of process membrane*

**B**





*H Height*
*D1 Diameter*
*d Diameter of seal*
*$d_M$ Max. diameter of process membrane*

**C**

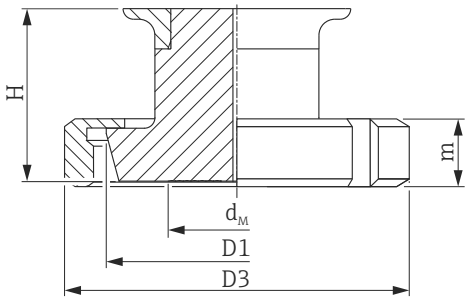


*H Height*
*m Height*
*D1 Diameter*
*D3 Diameter*
*$d_M$ Max. diameter of process membrane*

**D**

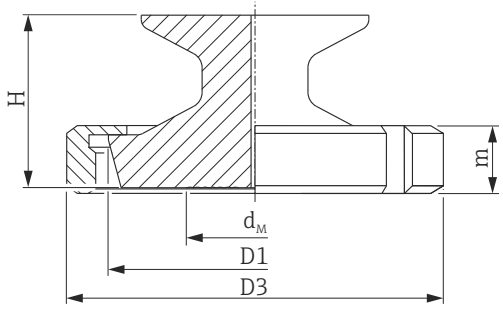



*H Height*
*m Height*
*D1 Diameter*
*D3 Diameter*
*$d_M$ Max. diameter of process membrane*

Unit mm (in)

| Designation | PN | D1 | D3 | d | $d_M$ | H | m | Material | Weight | Option [1] |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | kg (lbs) | |
| A: Clamp DN18-22, 3A | 40 | 34 (1.34) | - | 27.5 (1.08) | 17.2 (0.68) | max. 40 (1.57) | - | AISI 316L (1.4435) | 0.5 (1.10) | TBJ |
| B: Clamp 1", 3A | 40 | 50.5 (1.99) | - | 43.5 (1.71) | 21.65 (0.85) | | - | | 0.6 (1.32) | TCJ |
| B: Clamp 1½", 3A | 40 | 50.5 (1.99) | - | 43.5 (1.71) | 28 (1.10) | | - | | 0.6 (1.32) | TJJ |
| B: Clamp 2", 3A | 40 | 64 (2.52) | - | 56.5 (2.22) | 28 (1.10) | | - | | 0.7 (1.54) | TDJ |
| C: DIN11851 B25 | 40 | 43.4 (1.71) | 63 (2.48) | - | 28 (1.10) | | 21 (0.83) | | 0.7 (1.54) | MXJ |
| C: DIN11851 B32, 3A | 40 | 49.4 (1.94) | 70 (2.76) | - | 28 (1.10) | | 21 (0.83) | | 0.8 (1.76) | MIJ |
| D: DIN11851 B40, 3A | 40 | 55.4 (2.18) | 78 (3.07) | - | 28 (1.10) | | 21 (0.83) | | 0.9 (1.98) | MZJ |
| D: DIN11851 B50, 3A | 40 | 67.4 (2.65) | 92 (3.62) | - | 28 (1.10) | | 22 (0.87) | | 1.1 (2.43) | MRJ |


1) The roughness of the surface in contact with the medium is $R_a$ <0.76 µm (30 µin).

**E**

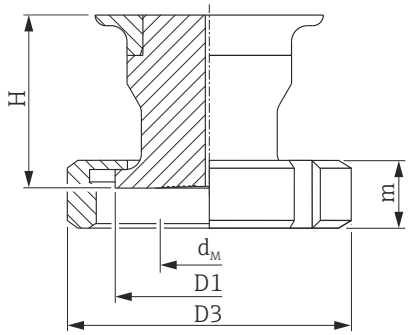



*H Height*
*m Height*
*D1 Diameter*
*D3 Diameter*
*$d_M$ Max. diameter of process membrane*

**F**

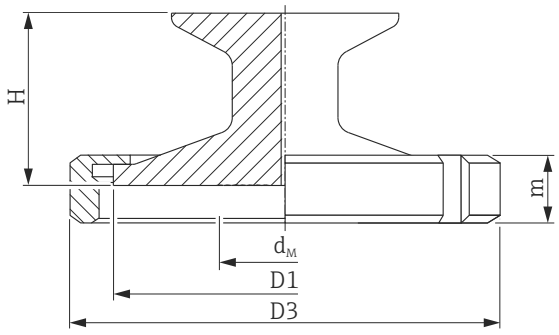



*H Height*
*m Height*
*D1 Diameter*
*D3 Diameter*
*$d_M$ Max. diameter of process membrane*

**G**




*H Height*
*D1 Diameter*
*D2 Diameter*
*$d_M$ Max. diameter of process membrane*

**H**





*H Height*
*D1 Diameter*
*D2 Diameter*
*$d_M$ Max. diameter of process membrane*

Unit mm (in)

| Designation | PN | D1 | D2 | D3 | $d_M$ | H | m | Material | Weight | Option [1] |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | kg (lbs) | |
| E: SMS 1", 3A | 25 | 35.5 (1.4) | - | 51 (2.01) | 21.65 (0.85) | max. 40 (1.57) | 20 (0.79) | AISI 316L (1.4435) | 0.7 (1.54) | T6J |
| F: SMS 1½", 3A | 25 | 55 (2.17) | - | 74 (2.91) | 28 (1.10) | | 25 (0.98) | | 0.8 (1.76) | T7J |
| F: SMS 2", 3A | 25 | 65 (2.56) | - | 84 (3.31) | 28 (1.10) | | 26 (1.02) | | 0.9 (1.98) | TXJ |
| G: Varivent B, 3A | 40 | 52.7 (2.07) | 31 (1.22) | - | 21.65 (0.85) | | - | | 0.7 (1.54) | TPJ |
| H: Varivent F, 3A | 40 | 66 (2.6) | 53 (2.09) | - | 28 (1.10) | | - | | 0.9 (1.98) | TQJ |
| H: Varivent N, 3A | 40 | 84 (3.31) | 71 (2.8) | - | 28 (1.10) | | - | | 1.1 (2.43) | TRJ |


1) The roughness of the surface in contact with the medium is $R_a$ <0.76 µm (30 µin).

**I**

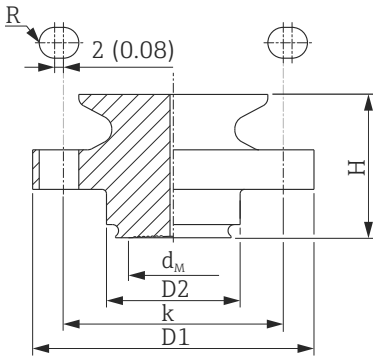



*H Height*
*D1 Diameter*
*k Pitch diameter*
*D2 Diameter*
*$d_M$ Max. diameter of process membrane*

**J**

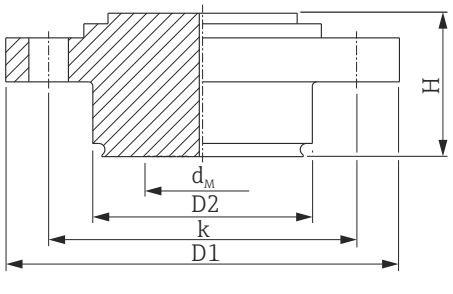



*H Height*
*D1 Diameter*
*k Pitch diameter*
*D2 Diameter*
*$d_M$ Max. diameter of process membrane*

**K**

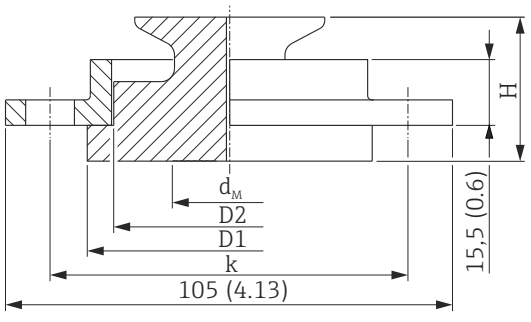


*H Height*
*D1 Diameter*
*k Pitch diameter*
*D2 Diameter*
*$d_M$ Max. diameter of process membrane*

**L**

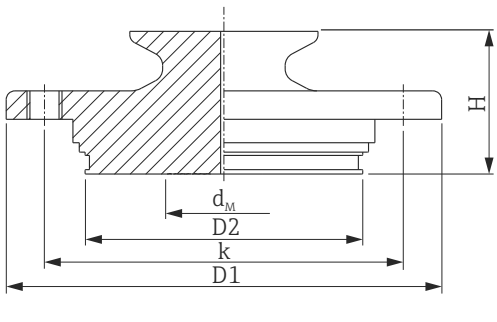



*H Height*
*D1 Diameter*
*k Pitch diameter*
*D2 Diameter*
*$d_M$ Max. diameter of process membrane*

Unit mm (in)

| Designation | PN | D1 | D2 | k | $d_M$ | H | Material | Weight | Option [1] |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | kg (lbs) | |
| I: Neumo D25, 3 A | 16 | 64 (2.52) | 30.4 (1.2) | 50 (1.97); 4 x, R 3.5 mm (0.14 in) | 21.65 (0.85) | max. 40 (1.57) | AISI 316L (1.4435) | 0.8 (1.76) | S1J |
| J: Neumo D50, 3A | 16 | 89.5 (3.52) | 49.9 (1.96) | 70 (2.76); 4 x ø 9 mm (0.35 in) | 28 (1.10) | | | 1.2 (2.65) | S4J |
| K: DRD | 25 | 64.5 (2.54) | 52.5 (2.07) | 84 (3.31); 4 x ø 11.5 mm (0.45 in) | 28 (1.10) | | | 1.0 (2.21) | TIJ |
| L: APV inline | 25 | 99.5 (3.92) | 64 (2.52) | 82 (3.23); 6 x ø 8.6 mm (0.34 in) + 2 x M8 | 28 (1.10) | | | 1.2 (2.65) | TMJ |

1) The roughness of the surface in contact with the medium is $R_a$ <0.76 µm (30 µin).

**Wall and pipe mounting with mounting bracket**

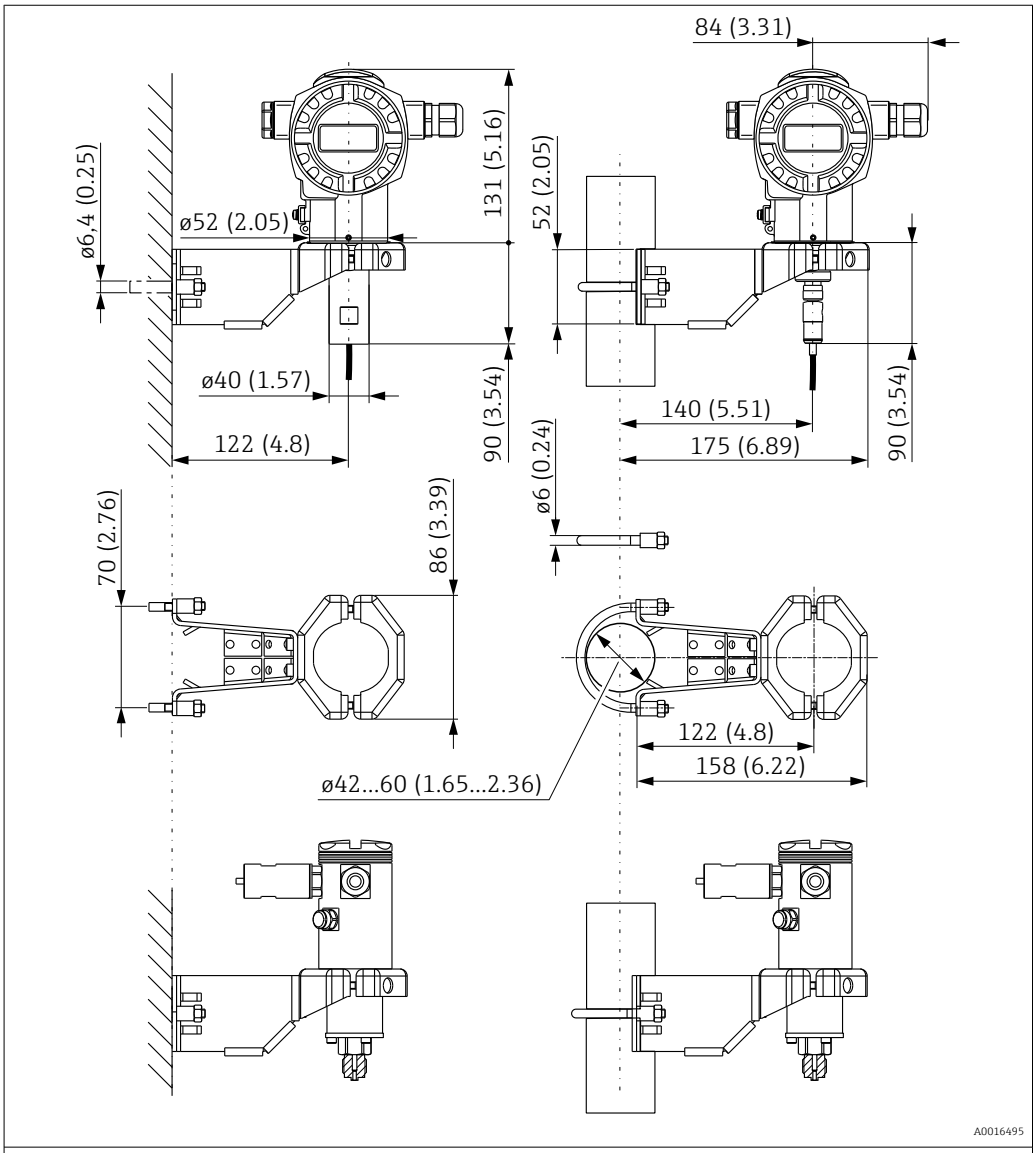


Engineering unit mm (in)

| Weight kg (lbs) | | Option [1] |
|---|---|---|
| Housing | Mounting bracket | |
| → 🖹 29 | 0.5 (1.1) | PA |

1) Product Configurator, order code for "Process connection"

Also available for order as a separate accessory: part number 71102216

## Materials in contact with process

NOTICE

- Device components in contact with the process are listed in the "Mechanical construction" → 28 and "Ordering information" sections.

### Delta ferrite content

A delta ferrite content of ≤ 3% can be guaranteed and certified for the wetted parts if option "KF" is selected in the "Test, Certificate" order code in the Product Configurator. If the FMD72 with hygienic process connections is selected, a delta ferrite content of ≤ 1% can be guaranteed and certified if option "KF" was selected in the "Test, Certificate" order code in the Product Configurator.

### TSE Certificate of Suitability

The following applies to all device components in contact with the process:

- They do not contain any materials derived from animals.
- No additives or operating materials derived from animals are used in production or processing.

### Process connections

- Endress+Hauser supplies DIN/EN flanges and threaded connection in stainless steel as per AISI 316L (DIN/ EN material number 1.4404 or 1.4435). With regard to their stability-temperature property, the materials 1.4404 and 1.4435 are grouped together under 13E0 in EN 1092-1: 2001 Tab. 18: The chemical composition of the two materials can be identical.
- "Clamp connections" and "Hygienic process connections": AISI 316L (DIN/EN material number 1.4435)
- Some process connections are also available in Alloy C276 (DIN/EN material number 2.4819). For this purpose see the information in the "Mechanical construction" section.


### Process membrane

| Sensor | Designation | Option [1] |
|---|---|---|
| FMD71 | $Al_2O_3$ aluminum oxide ceramic FDA [2], Ceraphire® (see also www.endress.com/ceraphire) | - |
| FMD72 | AISI 316L (DIN/EN material number 1.4435) | A |
| FMD72 | Alloy C (on request) | B |

1) Product Configurator, order code for "Process connection"
2) The US Food & Drug Administration (FDA) has no objections to the use of ceramics made from aluminum oxide as a surface material in contact with foodstuffs. This declaration is based on supporting documents from the FDA furnished by our ceramic suppliers.

**Materials not in contact with process**


**T14 transmitter housing**

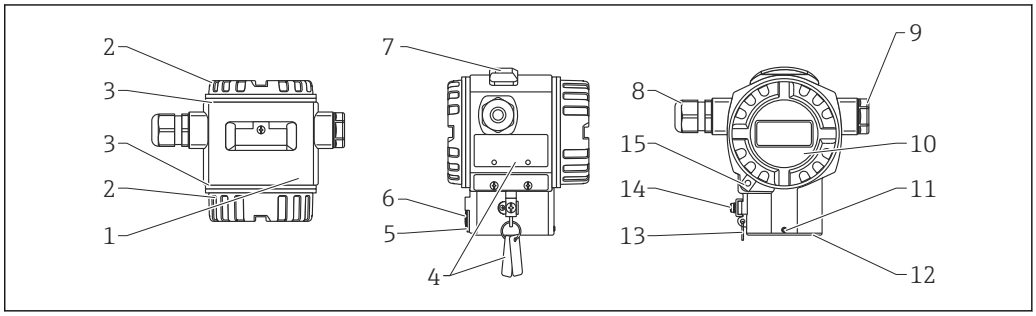


A0016496

| Item number | Component | Material |
|---|---|---|
| 1 | T14 housing, RAL 5012 (blue) | Die-cast aluminum with protective powder-coating on polyester base |
| | T14 housing | Precision cast AISI 316L (1.4435) |
| 2 | Cover, RAL 7035 (gray) | ▪ Die-cast aluminum with protective powder-coating on polyester base<br>▪ Coating on thread: Heat-curing lubricant varnish |
| | Cover | ▪ Precision cast AISI 316L (1.4435)<br>▪ Coating on thread: Heat-curing lubricant varnish |
| 3 | Cover seal | EPDM |
| 4 | Nameplates | AISI 304 (1.4404) |
| 5 | Pressure compensation filter, O-ring | VMQ or EPDM |
| 6 | Pressure compensation filter | AISI 316L (1.4404) and PBT-FR |
| 7 | External operation (keys and key cover), RAL 7035 (gray) | Polycarbonate PC-FR, screw A4 |
| 8 | Cable entry | Polyamide (PA) |
| | Seal | Silicone (VMQ) |
| 9 | Plug | PBT-GF30 FR, for dust ignition-proof: AISI 316L (1.4435) |
| | Seal | Silicone (VMQ) |
| 10 | Sight glass | Mineral glass<br>(polycarbonate on request) |
| | Sight glass seal | Silicone (VMQ) |
| 11 | Screw | A4 |
| 12 | Sealing ring | EPDM |
| | Snap ring | PA66-GF25 |
| 13 | Round strand rope for nameplates | AISI 304 (1.4301) / AISI 316 (1.4401) |
| 14 | External ground terminal | AISI 304 (1.4301) |
| 15 | Cover clamp | AISI 316L (1.4435) clamp, A4 screw |


**T17 transmitter housing**

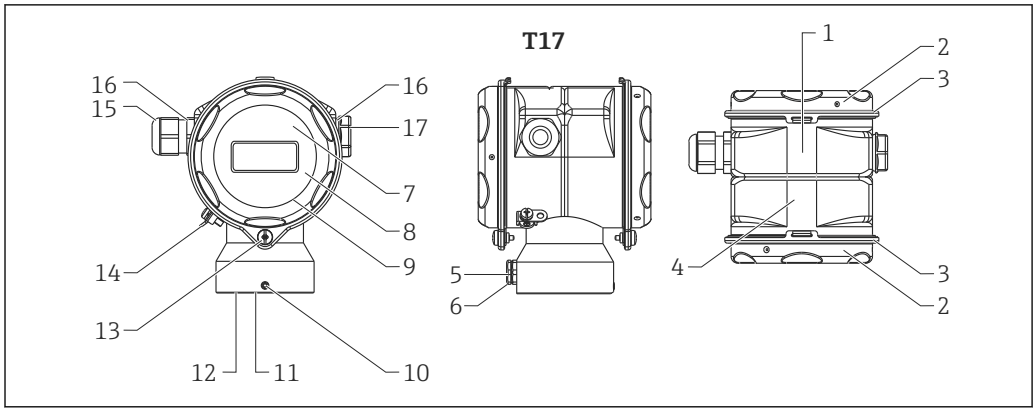


A0020021

| Item number | Component | Material |
|---|---|---|
| 1 | T17 housing | AISI 316L (1.4404) |
| | Cover | |
| 3 | Cover seal | EPDM |
| 4 | Nameplates | Lasered on |
| 5 | Pressure compensation filter | AISI 316L (1.4404) and PBT-FR |
| 6 | Pressure compensation filter, O-ring | VMQ or EPDM |
| 7 | Sight glass for non-hazardous area, ATEX Ex ia, NEPSI Zone 0/1 Ex ia, IECEx Zone 0/1 Ex ia, FM NI, FM IS, CSA IS | Polycarbonate (PC) |
| 8 | | |
| 9 | Sight glass seal | EPDM |
| 10 | Screw | A2-70 |
| 11 | Sealing ring | EPDM |
| 12 | Snap ring | PA6 |
| 13 | Screw | A4-50<br>Coating on thread: Heat-curing lubricant varnish |
| 14 | External ground terminal | AISI 304 (1.4301) |
| 15 | Cable entry M20 | Polyamide PA, for dust ignition-proof: CuZn nickel-plated |
| 16 | Seal of cable entry and plug | Silicone (VMQ) |
| 17 | Plug | PBT-GF30 FR, for dust ignition-proof: AISI 316L (1.4435) |


### Sensor modules

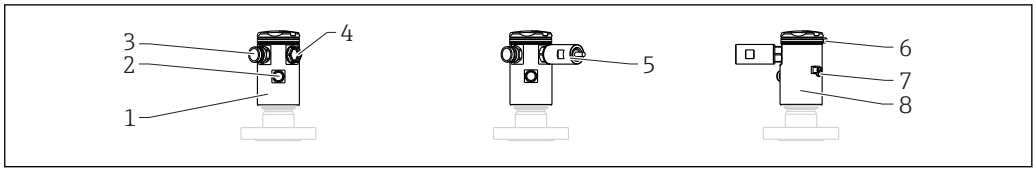


A0021295

| Item number | Component | Material |
|---|---|---|
| 1 | Sensor module housing and cover | Aluminum with protective powder-coating on polyester base |
| | | AISI 316L (1.4404) |
| 2 | Pressure compensation filter | PA6 GF10 or 316L (1.4404) |
| 3 | Cable gland | Brass Ms58, 2.0401, CuZn39Pb3 |
| 4 | Plug | PBT-GF30 FR, for dust ignition-proof: AISI 316L (1.4435) |
| | Seal | Silicone (VMQ) |
| 5 | Conduit adapter NPT ½" | 316L |
| 6 | Snap ring for cover | PP |
| 7 | Earth connection box | 316L |
| 8 | Nameplates | Plastic film |

### Connecting parts

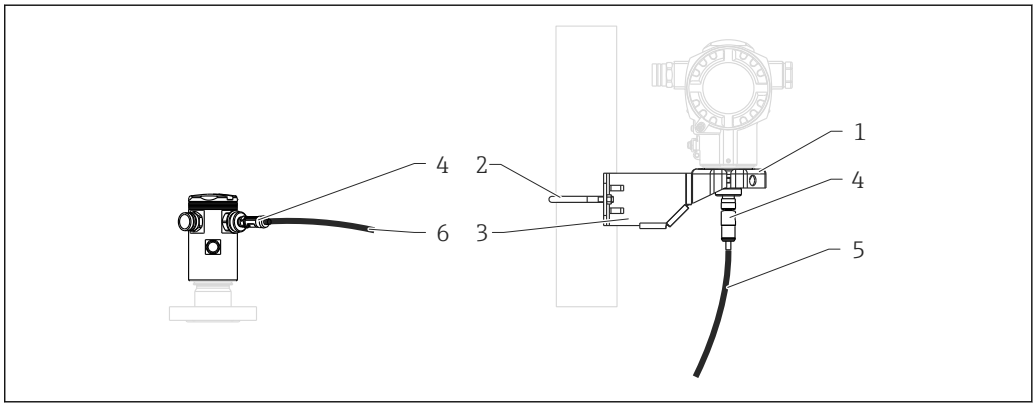


A0016497

| Item number | Component | Material |
|---|---|---|
| 1 | Mounting bracket | Bracket AISI 316L (1.4404) |
| 2 | | Screw and nuts A4-70 |
| 3 | | Half-shells: AISI 316L (1.4404) |
| 4 | M12 plug | PP and stainless steel |
| 5 | Cable for transmitter connection | PE-X halogen-free |
| 6 | Cable for sensor connection | PE-X halogen-free |

**Fill fluid**

| Designation | Option [1] |
|---|---|
| Silicone oil | 1 |
| Inert oil (on request) | 2 |
| Synthetic oil, FDA | 3 |

1) Product Configurator, order code for "Process connection"

# Operability

## Operation concept

### Operator-oriented menu structure for user-specific tasks

- Commissioning
- Software operation
- Diagnostics
- Expert level

### Quick and safe commissioning

Guided menus for applications

### Reliable operation

- Local operation possible in up to two languages
- Standardized operation at the device and in the operating tools
- Parameters relating to measured values can be locked/unlocked using the device's write protection switch, using the device software or via remote operation

### Efficient diagnostic behavior increases measurement availability

- Remedial measures are integrated in plain text
- Diverse simulation options

## Local operation

### Functions

| Function | External operation (operating keys, optional) | Internal operation (electronic insert) | Onsite display (optional) |
|---|---|---|---|
| Position adjustment (zero point correction) | ✔ | ✔ | ✔ |
| Setting lower range value and upper range value - reference pressure present at the device | ✔ | ✔ | ✔ |
| Device reset | ✔ | ✔ | ✔ |
| Locking and unlocking parameters relevant to the measured value | ✔ (only if display is connected) | ✔ | ✔ |
| Value acceptance indicated by the green LED | — | ✔ | ✔ |
| Switching damping on and off | ✔ (only if display is connected) | ✔ | ✔ |
| Min. Switch on min. alarm | ✔ (only if display is connected) | ✔ | ✔ |

### Operating the device using onsite display (optional)

A 4-line liquid crystal display (LCD) is used for display and operation. The onsite display shows measured values, dialog text as well as fault and notice messages in plain text, thereby supporting the user in every stage of operation.


The display can be removed for easy operation.

The device display can be turned in 90° steps.

Depending on the installation position of the device, this makes it easy to operate the device and read the measured value.

Functions:
- 8-digit measured value display including sign and decimal point, bargraph for 4 to 20 mA HART as current display.
- Simple and complete menu guidance due to breakdown of parameters into several levels and groups.
- Each parameter is given a 3-digit ID number for easy navigation.
- Option for configuring the display according to individual requirements and preferences, such as language, alternating display, display of other measured values such as sensor temperature, contrast setting.
- Comprehensive diagnostic functions (fault and warning message, peak-hold indicators, etc.).
- Quick and safe commissioning

*Overview*

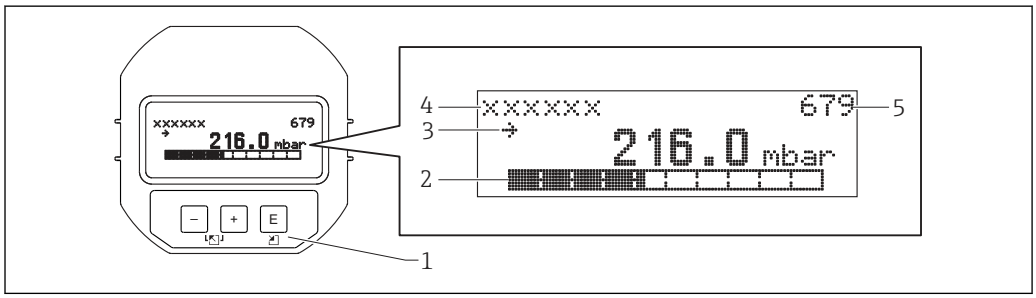



A0016498

*1 Operating keys*
*2 Bargraph*
*3 Symbol*
*4 Header*
*5 Parameter ID number*

**Operating keys on the exterior of the device**


With the T14 housing (aluminum or stainless steel), the operating keys are located either outside of the housing, under the protection cap or inside on the electronic insert. In addition, devices with an onsite display and a 4 to 20 mA HART electronic insert have operating keys on the onsite display.

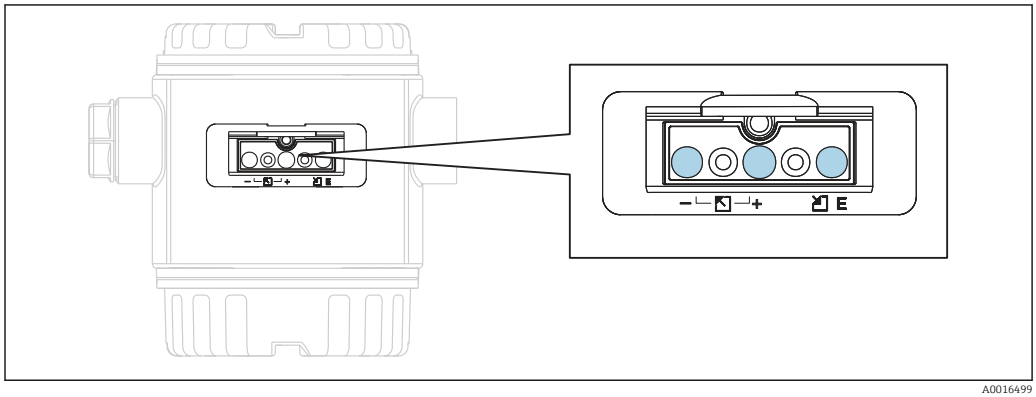


A0016499

The operating keys on the outside of the device make it unnecessary to open the housing. This guarantees:
- Complete protection against environmental influences such as moisture and contamination
- Simple operation without any tools
- No wear.

**Operating keys and elements located internally on the electronic insert**

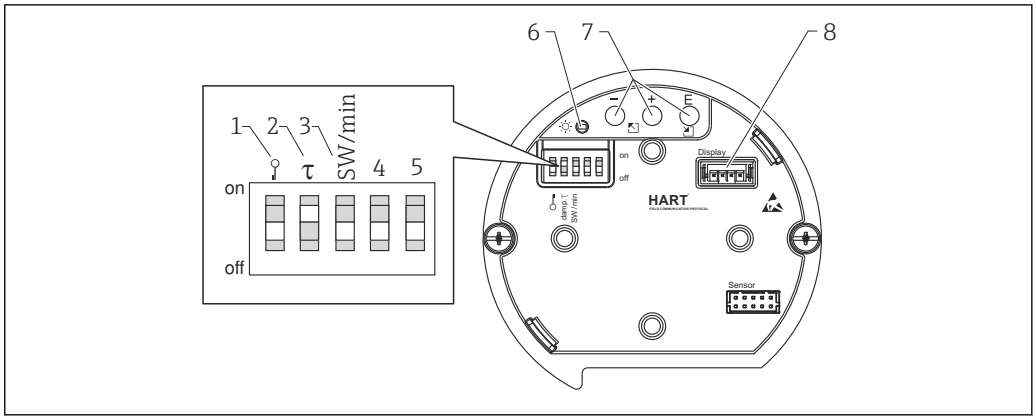


A0016500

*1 DIP switch for locking/unlocking parameters relevant to the measured value*
*2 DIP switch for switching damping on/off*
*3 DIP switch for alarm current SW/Alarm min (3.6 mA)*
*4…5 Not assigned*
*6 Green LED to indicate value being accepted*
*7 Operating keys*
*8 Slot for optional display*

**System integration**

The device can be given a tag name (max. 8 alphanumeric characters).

Measuring point (TAG), see additional specifications.: Product Configurator order code for "Identification", option "Z1"

**Languages**

You can also choose another language in addition to the standard language "English":

| Designation | Version [1] |
|---|---|
| English (standard) | AA |
| German | AB |
| French | AC |
| Spanish | AD |
| Italian | AE |
| Portuguese | AG |
| Chinese, simplified characters | AK |
| Japanese | AL |

1) Product Configurator, "Additional operating language" section

# Certificates and approvals

Current certificates and approvals for the product are available at www.endress.com on the relevant product page:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Downloads**.

**CE approval**

The device meets the legal requirements of the relevant EC directives. Endress+Hauser confirms that the device has been successfully tested by applying the CE mark.

**RoHS**

FMD72:

The measuring system complies with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS 2).

**RCM marking**

The supplied product or measuring system meets the ACMA (Australian Communications and Media Authority) requirements for network integrity, interoperability, performance characteristics as well as health and safety regulations. Here, especially the regulatory arrangements for electromagnetic compatibility are met. The products bear the RCM marking on the nameplate.



A0029561

**Ex approvals**

- ATEX
- FM
- CSA
- IECEx
- NEPSI

All explosion protection data are given in separate documentation which is available upon request. The Ex documentation is supplied as standard with all Ex-systems .

**Suitable for hygiene applications**

For information on installation and approvals, see documentation SD02503F "Hygiene approvals".

For information on 3-A and EHEDG-tested adapters, see documentation TI00426F "Weld-in adapter, process adapter and flanges".

**Pressure Equipment Directive 2014/68/EU (PED)**

**Pressure equipment with allowable pressure ≤ 200 bar (2 900 psi)**

Pressure equipment (having a maximum allowable pressure PS ≤ 200 bar (2 900 psi)) can be classified as pressurized equipment in accordance with Pressure Equipment Directive 2014/68/EU. If the maximum allowable pressure is ≤ 200 bar (2 900 psi) and the pressurized volume of the pressure equipment is ≤ 0.1 l, the pressure equipment is subject to the Pressure Equipment Directive (cf. Pressure Equipment Directive 2014/68/EU, Article 4, point 3). The Pressure Equipment Directive only requires that the pressure equipment shall be designed and manufactured in accordance with the "sound engineering practice of a Member State".

*Reasons:*

- Pressure Equipment Directive (PED) 2014/68/EU Article 4, point 3
- Pressure equipment directive 2014/68/EU, Commission's Working Group "Pressure", Guideline A-05 + A-06

*Note:*

A partial examination shall be performed for pressure instruments that are part of safety equipment for the protection of a pipe or vessel from exceeding allowable limits (equipment with safety function in accordance with Pressure Equipment Directive 2014/68/EU, Article 2, point 4).

**CRN approval**

- FMD71: A CRN approval is available for some device versions. These devices are fitted with a separate plate bearing the registration number CRN 0F23358.5C.
- FMD72: A CRN approval is available for some device versions. These devices are fitted with a separate plate bearing the registration number CRN 0F10525.5C.

A CRN-approved process connection can be obtained in one of the following ways:

- CRN-approved process connection must be ordered with a CSA approval
- CRN-approved process connection must be ordered with the "CRN" option in the order code for "Additional approval"

**Classification of process sealing between electrical systems and (flammable or combustible) process fluids in accordance with ANSI/ISA 12.27.01**

Endress+Hauser devices are designed in accordance with ANSI/ISA 12.27.01. allowing the user to waive the use and save the cost of installing external secondary process seals in the conduit as required by the process sealing sections of ANSI/NFPA 70 (NEC) and CSA 22.1 (CEC). These instruments comply with the North-American installation practice and provide a very safe and cost-saving installation for pressurized applications with hazardous fluids. Please refer to the following table for the seal class assigned (single seal or dual seal):

| Device | Approval | Single seal MWP |
|---|---|---|
| Deltabar FMD71/FMD72 | CSA, FM IS, XP, NI | 40 bar (580psi) |

Further information can be found in the control drawings of the relevant devices.

**Inspection certificates**

| Description | Option [1] |
|---|---|
| 3.1 Material certificate, wetted metallic parts, EN10204-3.1 inspection certificate | JA [2] |
| Conformity to NACE MR0175, wetted metallic parts | JB [2] |
| Helium leak test, internal procedure, inspection certificate | KD |
| Pressure test, internal procedure, inspection certificate | KE |
| PMI test (XRF), internal procedure, metal parts in contact with the medium, inspection certificate | KG |

1) Product Configurator order code for "Test, certificate"
2) The selection of this feature for coated process isolating diaphragms / process connections refers to the metallic base material.

# Ordering information

Detailed ordering information is available from your nearest sales organization www.addresses.endress.com or in the Product Configurator at www.endress.com:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Configuration**.

**Product Configurator - the tool for individual product configuration**
- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

## Scope of delivery

- Measuring instrument
- Optional accessories
- Brief Operating Instructions
- Certificates
- Mounting bracket for transmitter
- Cable shortening kit

## Measuring point (TAG)

| | |
|---|---|
| **Order code for** | 895: Marking |
| **Option** | Z1: Tagging (TAG), see additional spec. |
| **Location of measuring point identification** | To be selected in the additional specification:<br>▪ Tie-on label, stainless steel<br>▪ Adhesive paper label<br>▪ Label provided<br>▪ RFID TAG<br>▪ RFID TAG + tie-on label, stainless steel<br>▪ RFID TAG + adhesive paper label<br>▪ RFID TAG + label provided |
| **Definition of measuring point identification** | To be specified in additional specification:<br>3 lines each with a maximum of 18 characters<br>The measuring point designation appears on the selected label and/or the RFID TAG. |
| **Identification on electronic nameplate (ENP)** | 32 characters |

## Test reports, declarations and inspection certificates

All test reports, declarations and inspection certificates are provided electronically in the *Device Viewer*:
Enter the serial number from the nameplate (www.endress.com/deviceviewer)

**Product documentation on paper**
Test reports, declarations and inspection certificates in hard copy can optionally be ordered with feature 570 "Service", Version I7 "Product documentation on paper". The documents are then provided with the device upon delivery.

# Accessories

The accessories currently available for the product can be selected at www.endress.com:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Spare parts & Accessories**.

## Service-specific accessories

**Configurator**
Product Configurator - the tool for individual product configuration
- Up-to-the-minute configuration data
- Depending on the device: direct input of information specific to the measuring point, such as the measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

The Configurator is available at www.endress.com on the relevant product page:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Configuration**.

**DeviceCare SFE100**
DeviceCare is an Endress+Hauser configuration tool for field devices using the following communication protocols: HART, PROFIBUS DP/PA, FOUNDATION Fieldbus, IO/Link, Modbus, CDI and Endress+Hauser Common Data Interfaces.

Technical Information TI01134S
www.endress.com/sfe100

**FieldCare SFE500**
FieldCare is a configuration tool for Endress+Hauser and third-party field devices based on DTM technology.
The following communication protocols are supported: HART, WirelessHART, PROFIBUS, FOUNDATION Fieldbus, Modbus, IO-Link, EtherNet/IP, PROFINET and PROFINET APL.

Technical Information TI00028S
www.endress.com/sfe500

**Applicator**
Software for selecting and sizing Endress+Hauser measuring devices:
- Calculation of all the necessary data for identifying the optimum measuring device: e.g. pressure loss, accuracy or process connections.
- Graphic illustration of the calculation results

Administration, documentation and access to all project-related data and parameters over the entire life cycle of a project.

Applicator is available:
https://portal.endress.com/webapp/applicator

# Documentation

The following document types are available in the Downloads area of the Endress+Hauser website (www.endress.com/downloads), depending on the device version:

| Document type | Purpose and content of the document |
|---|---|
| Technical Information (TI) | **Planning aid for your device**<br>The document contains all the technical data on the device and provides an overview of the accessories and other products that can be ordered for the device. |
| Brief Operating Instructions (KA) | **Guide that takes you quickly to the 1st measured value**<br>The Brief Operating Instructions contain all the essential information from incoming acceptance to initial commissioning. |
| Operating Instructions (BA) | **Your reference document**<br>The Operating Instructions contain all the information that is required in various phases of the life cycle of the device: from product identification, incoming acceptance and storage, to mounting, connection, operation and commissioning through to troubleshooting, maintenance and disposal. |
| Description of Device Parameters (GP) | **Reference for your parameters**<br>The document provides a detailed explanation of each individual parameter. The description is aimed at those who work with the device over the entire life cycle and perform specific configurations. |
| Safety instructions (XA) | Depending on the approval, safety instructions for electrical equipment in hazardous areas are also supplied with the device. These are an integral part of the Operating Instructions.<br>The nameplate indicates which Safety Instructions (XA) apply to the device. |
| Supplementary device-dependent documentation (SD/FY) | Always comply strictly with the instructions in the relevant supplementary documentation. The supplementary documentation is a constituent part of the device documentation. |

# Registered trademarks

**HART®** Registered trademark of the HART Communication Foundation, Austin, USA




www.addresses.endress.com

Endress+Hauser

People for Process Automation